



DOUBLED ENDED LAMP INSTALLATION

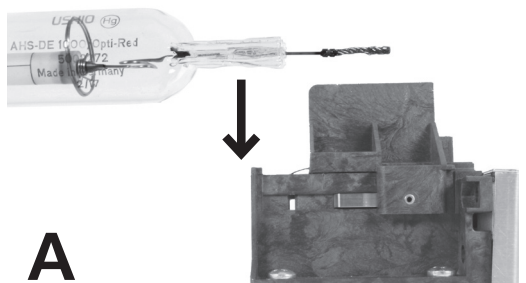

A

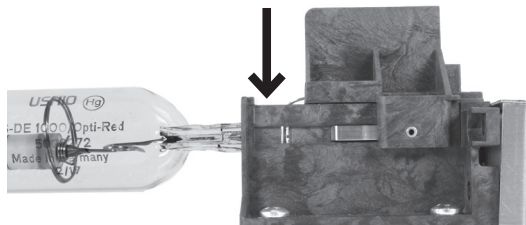


B




Insert lamp ends into sockets **(A)**.

Make sure that it has been properly locked in place by sliding the socket towards the middle of the fixture **(B)**. This prevents the lamp from falling out.

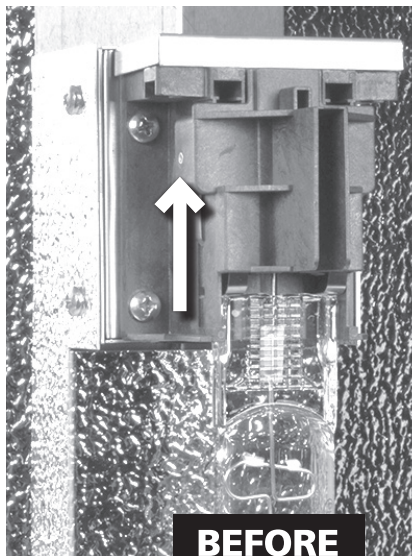

BEFORE

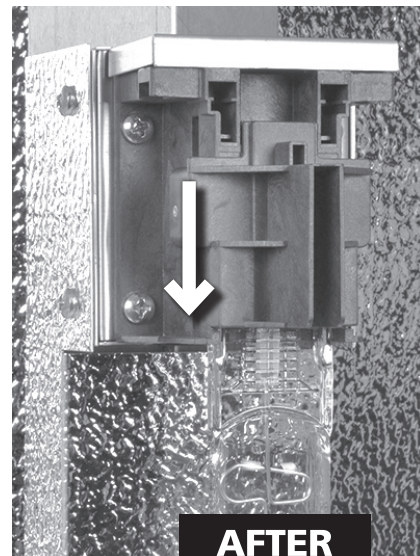

AFTER

NOTE: These lamps have a quartz jacket. Fingerprints and oils must be wiped off prior to operation.