


- Revolutionary CLOUD design
- 60% lighter due to environmentally friendly construction
- Smooth dimming with existing installations
- Suitable for use in totally enclosed fixtures

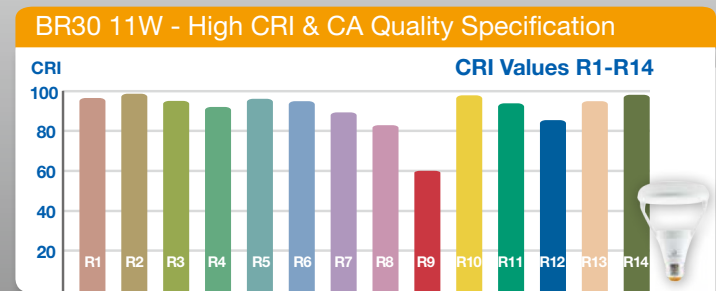

SPECIFICATIONS

Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CBCP (cd)	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.	Energy Star
BR40 14W	14BR40G4DIM/827	2700K	1065	85W	76	110°	N.A.	82	Yes	25,000	120V	Yes	✓
	14BR40G4DIM/830	3000K	1100	85W	79	110°	N.A.	82	Yes	25,000	120V	Yes	✓
BR40 9W	9BR40G4DIM/824	2400K	650	65W	72	110°	N.A.	80	Yes	25,000	120V	Yes	N.A.
	9BR40G4DIM/827	2700K	700	65W	78	110°	N.A.	82	Yes	25,000	120V	Yes	✓
BR30 8W	8BR30G4DIM/824	2400K	585	65W	73	110°	N.A.	80	Yes	25,000	120V	Yes	N.A.
	8BR30G4DIM/827	2700K	650	65W	81	110°	N.A.	82	Yes	25,000	120V	Yes	✓
	8BR30G4DIM/830	3000K	685	65W	86	110°	N.A.	82	Yes	25,000	120V	Yes	✓
	8BR30G4DIM/840	4000K	710	65W	89	110°	N.A.	82	Yes	25,000	120V	Yes	✓

SPECIFICATIONS

Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CBCP (cd)	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.	Energy Star
BR30 7.5W	7.5BR30G4/827	2700K	650	65W	87	110°	N.A.	82	No	25,000	120V	Yes	✓
	11BR30G4DIM/927	2700K	750	65W	68	110°	N.A.	92	Yes	25,000	120V	Yes	✓
BR30 11W GU24	11BR30G4DIM/927/GU24	2700K	750	65W	68	110°	N.A.	92	Yes	25,000	120V	Yes	✓
R20 6.5W	6.5R20G4DIM/824	2400K	450	45W	69	110°	N.A.	80	Yes	25,000	120V	Yes	N.A.
	6.5R20G4DIM/827	2700K	500	45W	77	110°	N.A.	82	Yes	25,000	120V	Yes	✓