



**OMNIDIRECTIONAL  
MULTI-VOLTAGE**
**A19**
**BENEFITS**

- ENERGY STAR Certified
- Up to 80% more efficient than incandescent equivalent
- Longer life and lower maintenance costs
- Mercury and Lead free, as well as UV and IR free
- Instant on to full brightness

**SPECIFICATIONS**

EQUIVALENT	60 Watt Incandescent
AVERAGE RATED LIFE	25,000 hrs
HOUSING	Plastic/Aluminum
BASE	Medium (E26)
POWER	120-277V 60Hz
LENS	Frosted
BEAM	320°
COLOR (K)	2700, 4000, 5000

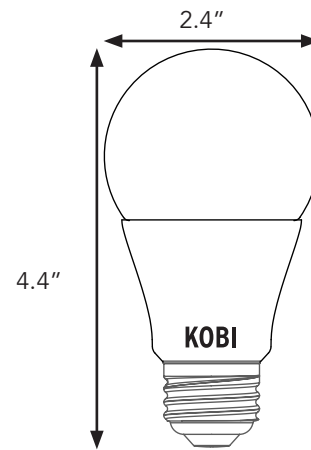

These omnidirectional, medium-based bulbs are available in 800 lumens, and are ideal for a facility that does not want the added cost of installing step-down transformers for smaller or traditional lighting applications.

**APPLICATION INFORMATION**

Applications	Market Segments
— Lamps and Luminaires	— Commercial
— Ceiling Fans	— Industrial
— Pendant	

**Application Notes**

1. Operating temperature range between -20°C and +45°C (-4°F and +113°F)
2. Not for use with emergency light fixtures or exit lights
3. Not for use in totally enclosed fixture
4. Suitable for indoor/damp locations and sheltered outdoor use

This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

**CERTIFICATIONS**


LM79 reports are available upon request.



Based on 12 hours of use per day.

# OMNIDIRECTIONAL A SERIES

## ORDERING INFORMATION

### A19

Order Code	Part Number	Wattage (W)	Base	Replaces	Voltage (V)	CCT <sup>1</sup>	Typical Lumens <sup>2</sup>	CRI <sup>3</sup>	Dim	Beam	Weight (lbs)	Case Quantity
K2N8	LED-800-AO-27-MV-ND	10	E26	60W A19	120-277	2700	800	81	No	320°	0.3	40
K2N9	LED-800-AO-40-MV-ND	10	E26	60W A19	120-277	4000	800	81	No	320°	0.3	40
K3N0	LED-800-AO-50-MV-ND	10	E26	60W A19	120-277	5000	800	83	No	320°	0.3	40

1. Thermally stable typical CCT (±10%) 2. Thermally stable typical lumens (±10%) 3. CRI - Color Rendering Index