

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use where dust, dirt, humidity, moisture and cold temperatures are present. Perfect for indoor and outdoor use.

### CONSTRUCTION

The high-impact polycarbonate lens allows for bright illumination. Fully gasketed to protect against wet, cold and dusty environments. Starts down to 0°F (-18°C).

### OPTICS

Contains 4000K LEDs that produce approximately 1800 lumens at 50,000 hours life. CRI = 88.

### ELECTRICAL

Fixture operates at 120 volts, 60 HZ and ensures no flickering and quiet operation without interfering with other home electronics. Standard input wattage is 24 watts, 75 lumens per watt.

### INSTALLATION

Mounting hardware and watertight fitting for 3/8" conduit included.

### LISTINGS

cUL listed to U.S. and Canadian safety standards. IP65 rated. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

Indoor/Outdoor General Purpose

# XWLED

4' SLIM LED WET LIGHT  
HIGH-PERFORMANCE LED




### Specifications

Width: 2-3/8 (6.0)

Height: 3 (7.6)

Length: 47-1/2 (121)

All dimensions are inches (centimeters) unless otherwise indicated.

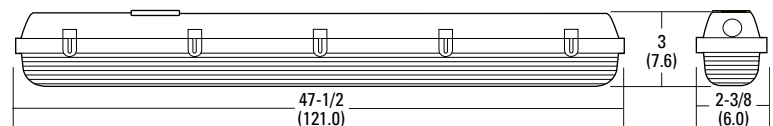

### ORDERING INFORMATION


For shortest lead times, configure product using **standard options (shown in bold)**.

Example: XWLED4 120

XWLED4		120	
Series	CRI	Color temperature	Voltage
<b>XWLED4</b> 4' LED wet light	<b>(blank)</b> 88 CRI	<b>(blank)</b> 4000K	<b>120</b> 120-volt residential electronic driver

XWLED 4" Slim LED Wet Light

LIGHTING FACTS

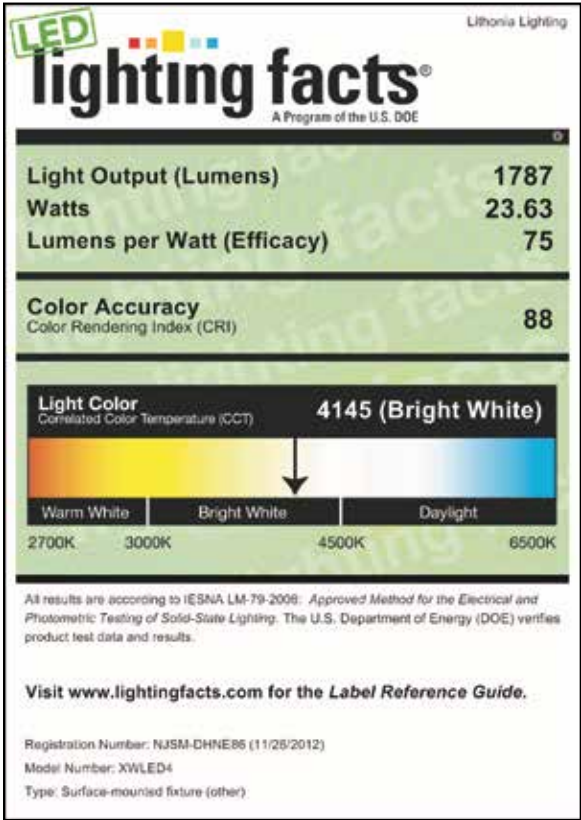

PHOTOMETRICS

XWLED4, 4000 K LEDs, 23.7 input watts,1830 delivered lumens, test no. LTL22837, tested in accordance to IESNA LM-79-08.

