

PLS 3.5W HYB G23 TITANIUM LED SERIES

Preliminary Specifications



3.5W REPLACES




9W
CFL

60% Energy Savings

PRO



- ⌚ **HYBrid installation - DIrect or BYPass**
- ⌚ **Compatible with magnetic ballasts - DIrect installation**
- ⌚ **Built-in universal voltage driver - BYPass installation**
- ⌚ **180° rotatable base**
- ⌚ **Exceptional efficacy 86 LPW**
- ⌚ **Suitable for use in totally enclosed fixtures**



LM 79

LM 80

TM 21



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS



PLS 3.5W HYB G23 TITANIUM LED SERIES

Preliminary Specifications




APPLICATIONS


Office



Hospitality

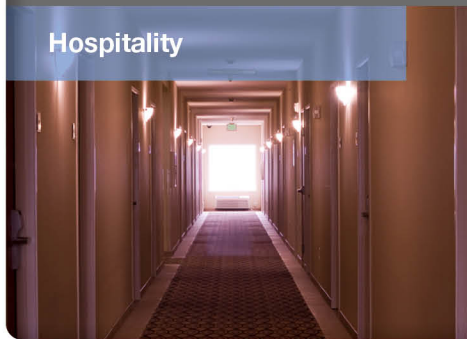


General

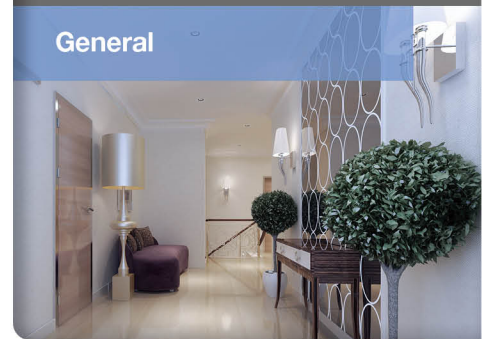

Ref.#:DS107-PLS-3.5W-HYB-G23

Base: G23 (2-pin CFL)
Voltage: Magnetic ballast compatible
 120-277V
Dimmable: No
PF: 0.9
Lifetime: 40,000 hrs
Weight: 0.08lb / 38g

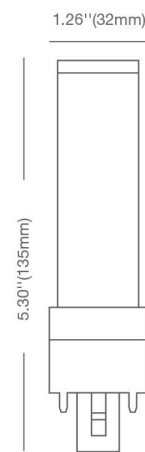

SPECIFICATIONS**

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
3.5PLS/835/HYB/G23	57814	3.5	Neutral White 3500K	80	300	86	120°

* Suitable for use in totally enclosed fixtures

** Specification data is preliminary and may be subject to change

*** Suitable for damp locations. Not for use where directly exposed to weather or water

**** Full installation guide and more details available on website