

PLS 5.5W BYP 2GX7 TITANIUM LED SERIES

Preliminary Specifications



5.5W REPLACES



**13W
CFL**

60% Energy Savings

PRO



- ⌚ Built-in universal voltage driver - Bypass installation
- ⌚ 180° rotatable base
- ⌚ Exceptional efficacy 91 LPW
- ⌚ Last 4 times longer than CFL
- ⌚ Compact form factor fits most fixtures
- ⌚ Suitable for use in totally enclosed fixtures



40,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)



ENCLOSED*



LM 79

LM 80

TM 21





COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS




PLS 5.5W BYP 2GX7 TITANIUM LED SERIES

Preliminary Specifications

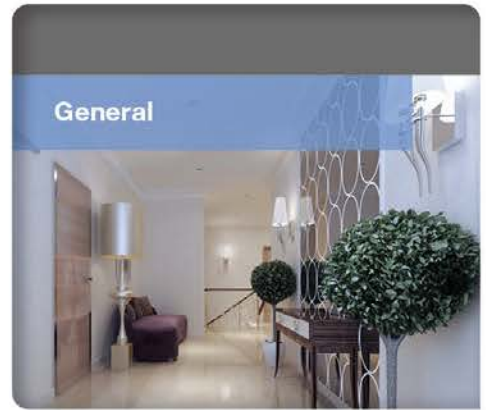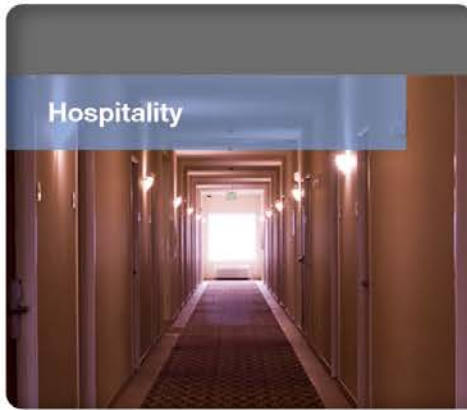

Ref.#:DS-106-PLS-5.5W-BYP-2GX7

- Base:** 2GX7 (4-pin CFL)
- Voltage:** 120V - 277V
- Dimmable:** No
- PF:** 0.9
- Lifetime:** 40,000 hrs
- Weight:** 0.06lb. / 26g

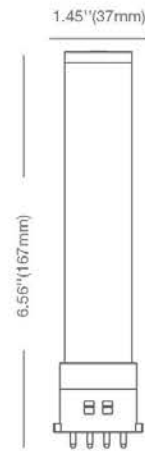

SPECIFICATIONS**

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
5.5PLS/835/BYP/2GX7	57826	5.5	Neutral White 3500K	80	500	91	120°

* Suitable for use in totally enclosed fixtures
 ** Specification data is preliminary and may be subject to change
 *** Suitable for damp locations. Not for use where directly exposed to weather or water
 **** Full installation guide and more details available on website