


Plusrite®

High Pressure Sodium ECO (TCLP Compliant)

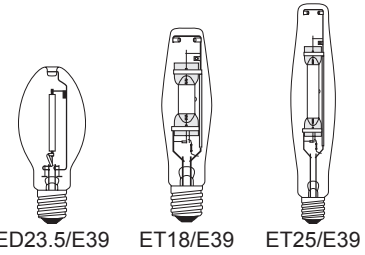

ED23.5/E39 ET18/E39 ET25/E39

HID

| Product Information | | | | | | | Physical Information | | | Photometric Characteristics | | | | | |
|---------------------|--------|------|-------|------------------|------|-----------|----------------------|----------|----------|-----------------------------|------------------|-----------------|----------------|-----|--------------|
| Watts | Bulb | Base | Item# | Description | ANSI | Case Qty. | Finish | MOL (in) | LCL (in) | Initial Lumens (lm) | Mean Lumens (lm) | Avg. Life (Hrs) | Color Temp (K) | CRI | UPC |
| 70 | ED23.5 | E39 | 2044 | LU70/ED23.5/ECO | S62 | 12 | Clear | 7.75 | 5.00 | 6300 | 5500 | 24000 | 2000 | 22 | 844366020445 |
| 100 | ED23.5 | E39 | 2045 | LU100/ED23.5/ECO | S54 | 12 | Clear | 7.75 | 5.00 | 9500 | 8000 | 24000 | 2000 | 22 | 844366020452 |
| 150 | ED23.5 | E39 | 2046 | LU150/ED23.5/ECO | S55 | 12 | Clear | 7.75 | 5.00 | 16000 | 13800 | 24000 | 2000 | 22 | 844366020469 |
| 200 | ET18 | E39 | 2049 | LU200/ET18/ECO | S66 | 12 | Clear | 9.75 | 5.75 | 22000 | 19800 | 24000 | 2000 | 22 | 844366020490 |
| 250 | ET18 | E39 | 2047 | LU250/ET18/ECO | S50 | 12 | Clear | 9.75 | 5.75 | 29000 | 26100 | 24000 | 2000 | 22 | 844366020476 |
| 400 | ET18 | E39 | 2048 | LU400/ET18/ECO | S51 | 12 | Clear | 9.75 | 5.75 | 50000 | 45000 | 24000 | 2000 | 22 | 844366020483 |
| 1000 | ET25 | E39 | 2050 | LU1000/ET25/ECO | S52 | 12 | Clear | 15.06 | 8.75 | 130000 | 124000 | 24000 | 2000 | 22 | 844366020506 |