

OLAW LED Area/Wall Light

Lithonia Lighting® integrates long-life LEDs in an affordable, energy-saving security lighting solution.

The versatile OLAW LED Area/Wall light from Lithonia Lighting® provides up to 50,000 hours of virtually maintenance-free illumination for outdoor use in residential and commercial applications.

With its sturdy, weather-resistant aluminum housing and bronze finish, the OLAW is ideal for many outdoor spaces requiring stylish, reliable security lighting.

The OLAW LED Area/Wall Light at a glance:

- 10 high-performance 5000k LEDs powered by a 120-volt driver
- 35 input watts with 2,300 delivered lumens
- Adjustable Dusk-to-Dawn photocell, standard
- Nighttime Friendly™ full cutoff above 90° angle
- Wall mount with or without wall plate (included) or arm mount
- Rugged, weather-resistant aluminum housing
- Clear polycarbonate lens, wet location listed
- Five-year warranty



Versatile Mounting Options



OLAW LED Area/Wall Light



Lithonia Lighting


lighting facts®
A Program of the U.S. DOE

Light Output (Lumens)	2304
Watts	35
Lumens per Watt (Efficacy)	65
Color Accuracy Color Rendering Index (CRI)	67
Light Color Correlated Color Temperature (CCT)	5037 (Daylight)

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-Y124GT
Model Number: OLAW23 53K 120 PE BZ
Type: Outdoor arearoadway fixture

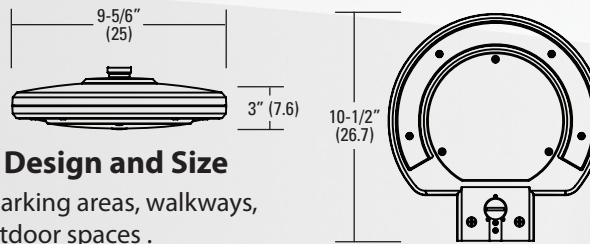


Lightweight, Contemporary Design and Size

Ideal for lighting building facades, parking areas, walkways, garages, loading areas and other outdoor spaces.

Energy & Maintenance Savings

The OLAW23 uses only 35 input watts, requiring less energy when compared to traditional light sources. The LEDs last 50,000 hours requiring no maintenance costs for more than 11 years!* Quality tested in accordance with IESNA LM-79 and LM-80.

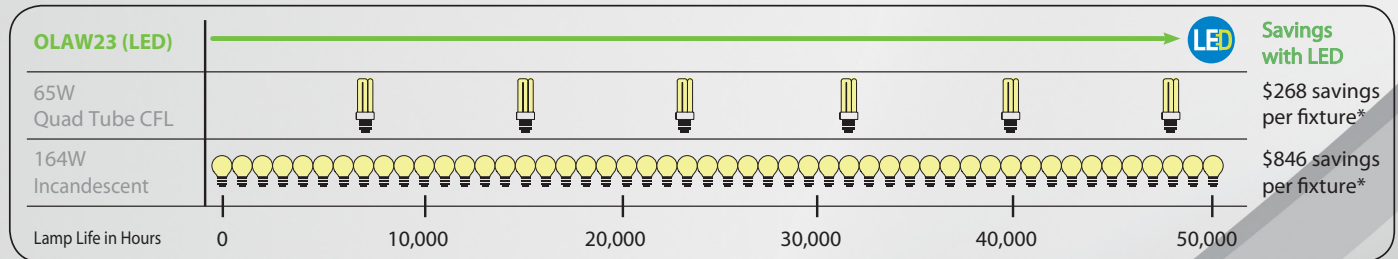

*Energy savings over the life of the fixture based on difference in input watts @ \$.12KWh and operating 12 Hours/Day, 365 Days/year. Total savings over life of the fixture is total Energy Savings + Cost of replacement lamps required for traditional source.

ORDERING INFORMATION

Example: OLAW23 53K 120 PE BZ

Series	Color temperature	Voltage	Features	Finish
OLAW23 LED Area / Wall Light	53K 5000K	120 120 Volt	PE Photocell included	BZ Bronze

Accessories: Order as separate catalog number.

OMA M6 14" Aluminum Mounting Arm

