

# 90410/90414

## LED HIGH BAY

### INSTALL INSTRUCTIONS

#### SPECIFICATIONS

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	VOLTS	HOURS	CASE
90410	LED 60W HIGH BAY HOUSING/41K/100-277V/DIMMABLE - SUPERIOR LIFE®	60	4100K	6050	100-277	50,000	1
90414	LED 100W HIGH BAY HOUSING/41K/100-277V/DIMMABLE - SUPERIOR LIFE®	100	4100K	10200	100-277	50,000	1

#### WARNING

The units should not be used in areas with limited ventilation or high-ambient temperatures.

Ensure power is off before starting installation, wiring or attempting any maintenance should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.

All work should be performed by a qualified electrician.


The mounting wall should be of sufficient strength; its endurance force must be greater than the fixture's weight.

Fixture should not be recessed. Fixture must be positioned with lamp in horizontal position.

#### INSTALLATION



**1:** Secure the unit to the mounting surface, install the mounting ring that on the luminaire on the hook that had been secured on the ceiling or use the steel wire to install luminaire on the hook or ring that existed on the ceiling. The hook and ring are not with the luminaire, the user should buy the appropriate hook or ring. (see Fig. 'A' below);

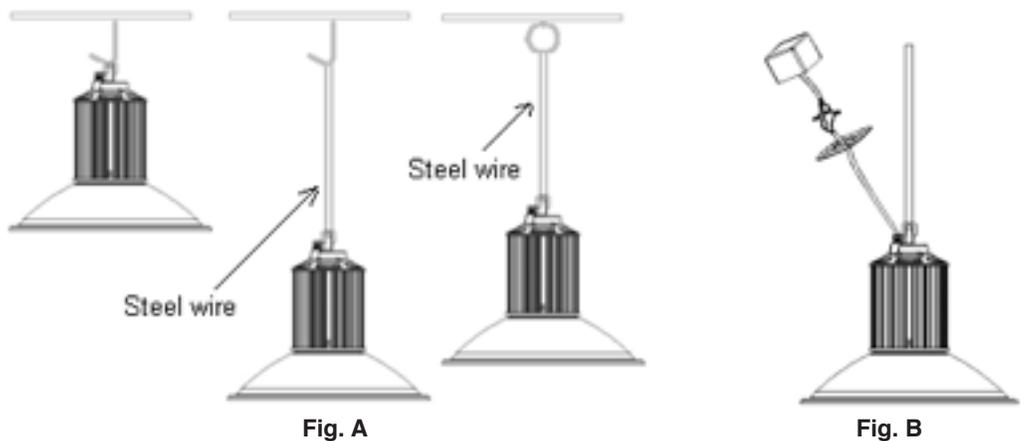

**2:** Make wire connections, connect the power supply that in the outlet box to the black wire to ( L ), White to ( N ), Green to ( Earth) (see Fig. "B")

#### MAINTENANCE:

The unit is designed for years with minimum care. When cleaning the fixture, make sure you have the power turned off and do not spray liquid cleaner directly onto the LED, socket, or wiring.

When the light does not work, make sure the power is off before inspection and it should be done by a qualified electrician.