

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/4") also makes it an excellent choice for renovation projects.

**CONSTRUCTION** — BLT enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability. Injection molded diffuser light traps add a finished look to the diffuser ends and help seal the diffuser to the housing end plates. Optional diffuser trim rings provide an attractive mounting for integral sensors as well as adding a decorative element to the luminaire aesthetics.

LED boards are accessible from below; driver is accessible from the plenum.

**OPTICS** — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available – curved and square designs with linear prisms or a smooth frosted finish.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

**Non-Configurable BLT: 0-10 volt dimming driver. Dims to 10%**

**Configurable BLT:** available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the BLT luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

**SENSOR — Integrated sensor (individual control):** Sensor Switch MSD7ADCX ((Passive infrared (PIR)) or MSDPDT7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 2 for more details on the integrated sensor.

**Integrated Sensor (nLight Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 2 for the nLight sensor options.

**INSTALLATION** — The BLT's low profile design of only 2-3/4" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

**LISTINGS** — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type



BLT Series LED

# BLT

1' x 4'  
LED




### Specifications

Length: 47-3/4 (121.2)


Width: 11-3/4 (29.8)

Depth: 2-3/4 (6.9)



All dimensions are inches (centimeters) unless otherwise specified.

## Multiple Diffuser Options

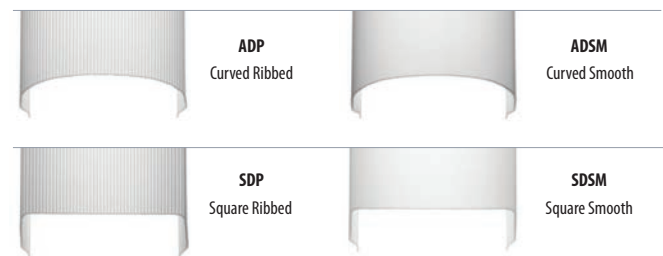

# BLT Volumetric Recessed Lighting 1'x4'

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** BTL4 30L ADP EZ1 LP835

BLT4	Series	Air function	Lumens <sup>1</sup>	Diffuser	Voltage	Driver	Color temperature
	BLT4 1x4 BLT	(blank) Static	<b>Standard efficiency (&gt;100 LPW)</b> 20L 2000 30L 3000 <b>40L 4000</b> 48L 4800 60L 6000	<b>ADP Curved, Linear Prisms</b> AD5M Curved, Smooth SDP Square, Linear Prisms SDSM Square, Smooth <b>Diffusers w/ trim rings</b> ADPT Curved, Linear Prisms ADSMT Curved, Smooth SDPT Square, Linear Prisms SDSMT Square, Smooth	(blank) MVOLT 347 347 <sup>2</sup>	EZ1 eldoLED dims to 1% (0-10 volt dimming) SLD Step-level dimming <sup>3</sup>	LP830 82CRI, 3000K <b>LP835 82CRI, 3500K</b> LP840 82CRI, 4000K LP850 82CRI, 5000K LP930 90CRI, 3000K LP935 90CRI, 3500K LP940 90CRI, 4000K LP950 90CRI, 5000K

Controls	Occupancy Control <sup>5</sup>	Options
(blank) No nLight® N80 nLight® with 80% lumen management N80EMG nLight® with 80% lumen management For use with generator supply EM power <sup>4</sup> N100 nLight® without lumen management N100EMG nLight® without lumen management For use with generator supply EM power <sup>4</sup>	(blank) No sensor control <b>nLight Wired Networking</b> NES7 nLight™ nES 7 PIR integral occupancy sensor <sup>6</sup> NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control <sup>6</sup> NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell <sup>6</sup> NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell <sup>6</sup>	<b>Individual Control</b> MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell <sup>3,7</sup> MSPDPT7ADCX PDT integral occupancy sensor with automatic dimming control photocell <sup>3,7</sup> EL7L 700 lumen battery pack <sup>8</sup> EL14L 1400 lumen battery pack <sup>8</sup> CP Chicago plenum BGTD Bodine Generator Transfer Device PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires GLR Fast-blowing fuse <sup>9</sup> GMF Slow-blowing fuse <sup>9</sup> NPLT Narrow pallet RRL_ RELOC®-ready luminaire <sup>10</sup> LATC Earthquake clip DWAM Anti-Microbial paint

Accessories: Order as separate catalog number.	
DGA14	Drywall grid adapter for 1x4 recessed fixture

nLight® Control Accessories: Order as separate catalog number. Visit <a href="http://www.sensorswitch.com/nLight">www.sensorswitch.com/nLight</a> for complete listing of nLight controls.			
<b>WallPod stations</b>	<b>Model number</b>	<b>Occupancy sensors</b>	<b>Model number</b>
On/Off	nPODM [color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPODM DX [color]	Large motion 360°, ceiling (PIR / dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX	Wall switch with raise/lower	nWSPDPTLVDX
<b>Photocell controls</b>	<b>Model number</b>	<b>Cat-5 cable bundles (plenum rated)</b>	<b>Model number</b>
On/Off & Dimming	nCM ADCX	10', 15 pieces per bundle	CAT5 10FT
		30', 15 pieces per bundle	CAT5 30FT

Non-Configurable BLT Configurations								
Stock/MTO	Catalog Description *	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	BLT4 40L ADP LP835	00889804541557	3975	34	116	3500K/82CRI	120-277	39
	BLT4 40L ADP LP840	00889804541571	4062	34	119	4000K/82CRI	120-277	39
MTO	BLT4 40L ADP 347 LP835	00889804569414	3975	34	116	3500K/82CRI	347	39
	BLT4 40L ADP 347 LP840	00889804569438	4062	34	119	4000K/82CRI	347	39

\*0-10V Dimming to 10%.

### Notes

- 1 Approximate lumen output.
- 2 Not available with SLD,EL7L or EL14L battery packs.
- 3 Not available with N80, N80EMG, N100, N100EMG or occupancy control.
- 4 nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture
- 5 Must specify diffuser with trims rings. See sensor options on page 3.
- 6 Requires N80, N80EMG, N100, or N100EMG.
- 7 Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
- 8 When using pre-wire option, use PWS1846 or PWS1846 PWSLV.
- 9 Must specify voltage, 120 or 277.
- 10 For ordering logic consult: [RRL\\_2013](http://RRL_2013).

# BLT Volumetric Recessed Lighting 1'x4'

Sensor Options				
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking
		PIR	PDT	
MSD7ADCX	X	X		
MSDPDT7ADCX	X		X	
NES7		X		X
NES7ADCX	X	X		X
NESPDT7			X	X
NESPDT7ADCX	X		X	X



## Basic nLight Zone



## Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.


The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

## nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

## Sequence of Operation

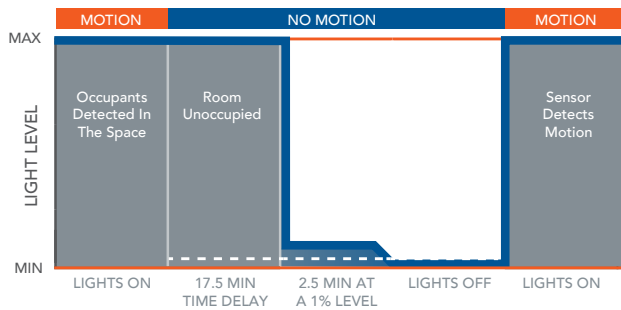

\*The presetting on the automatic dimming photocell is 5fc.

## Sequence of Operation

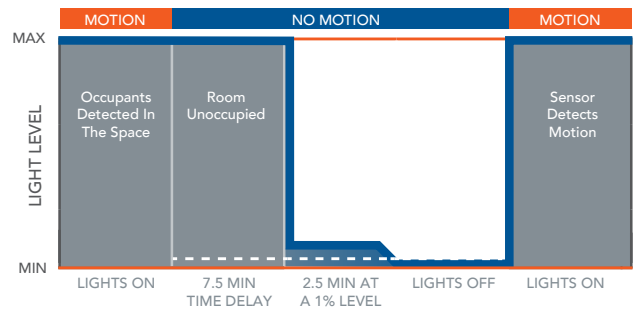


\*The presetting on the automatic dimming photocell is 5fc.

## Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor


## 9 FT Mounting

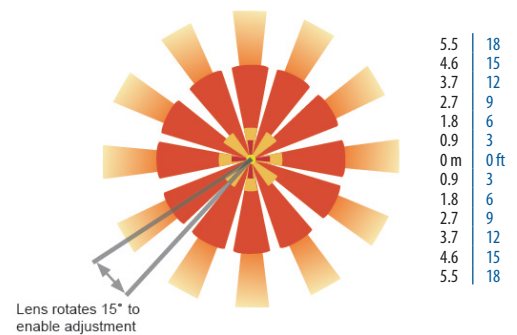


# BLT Volumetric Recessed Lighting 1'x4'

## PHOTOMETRICS

**BLT4 40L ADP LP835**, 3975 delivered lumens, test no. LTL28918P61, tested in accordance to IESNA LM-79


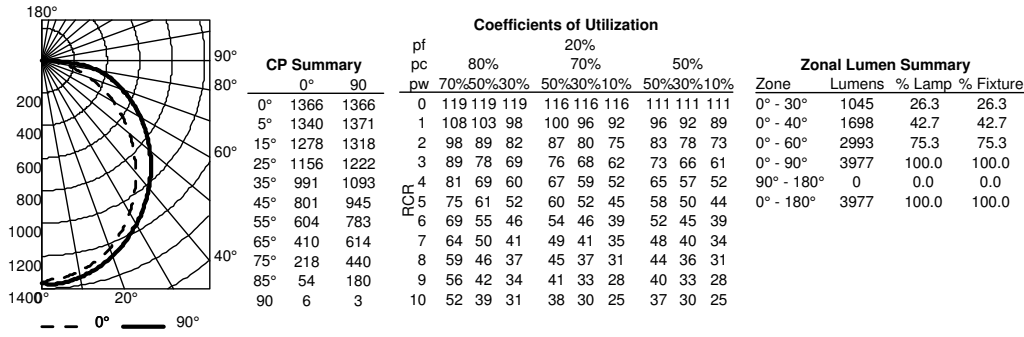


**BLT4 48L ADP L835**, 5148 delivered lumens, test no. LTL28918P65, tested in accordance to IESNA LM-79

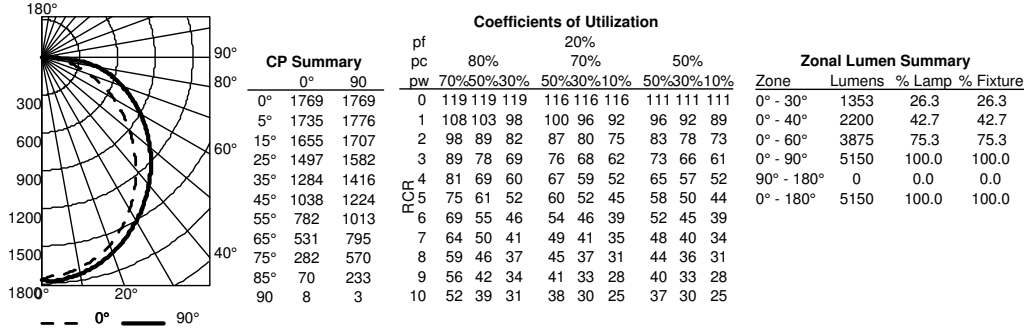

## Constant Lumen Management


Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

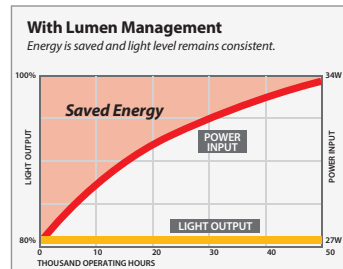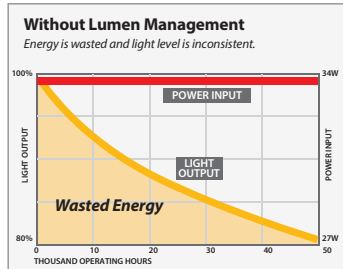

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
20L ADP LP830	2231	19	120
20L ADP LP835	2289	19	123
20L ADP LP840	2339	19	126
20L ADP LP850	2454	19	132
30L ADP LP830	3311	29	113
30L ADP LP835	3397	29	116
30L ADP LP840	3471	29	119
30L ADP LP850	3642	29	124
40L ADP LP830	3875	34	113
<b>40L ADP LP835</b>	<b>3975</b>	<b>34</b>	<b>116</b>
40L ADP LP840	4062	34	119
40L ADP LP850	4262	34	125
48L ADP LP830	5018	46	110
48L ADP LP835	5148	46	112
48L ADP LP840	5261	46	115
48L ADP LP850	5520	46	121
60L ADP LP830	5969	53	112
60L ADP LP835	6124	53	115
60L ADP LP840	6258	53	117
60L ADP LP850	6566	53	123

HE Performance Data			
Lumen Package	Lumens	Input Watts	LPW
48LHE ADP LP830	4701	36	129
48LHE ADP LP835	4822	36	132
48LHE ADP LP840	4929	36	135
48LHE ADP LP850	5171	36	142
60LHE ADP LP830	5400	42	128
60LHE ADP LP835	5540	42	132
60LHE ADP LP840	5662	42	134
60LHE ADP LP850	5941	42	141

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1' and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*

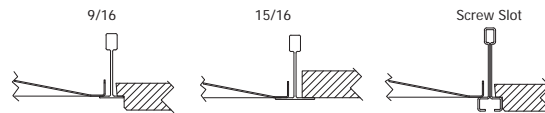

\*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 12-3/4" x 48-3/4" (Tolerance is +1/8", -0").