
## <u>DeepGlow Installation Guide — Please read carefully.</u>

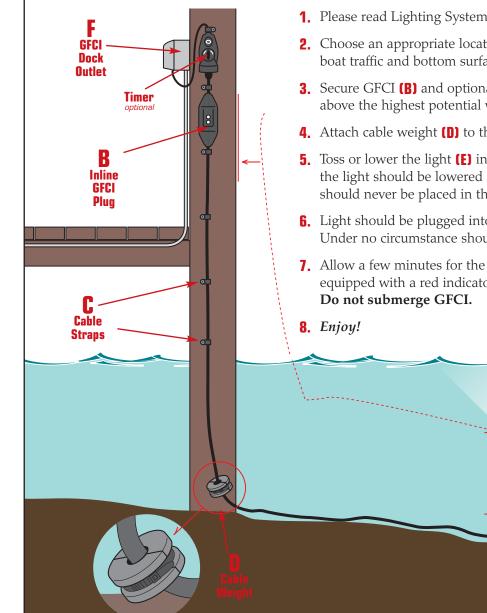

- **1.** Please read Lighting System General Operation page before installing.
- 2. Choose an appropriate location by considering depth, boat traffic and bottom surface material. (A)
- 3. Secure GFCI (B) and optional timer with supplied cable straps (C) well above the highest potential water level.

Boat

Clearance

- **4.** Attach cable weight **(D)** to the cord as shown.
- **5.** Toss or lower the light **(E)** into the water. The light is designed to land lens side up. In rocky areas, the light should be lowered and placed carefully on the bottom. Light and cable should never be placed in the potential path of a boat, without adequate clearance. (A)
- **6.** Light should be plugged into a Ground Fault Circuit Interrupter (GFCI) Outlet. **(F)** Under no circumstance should a light be installed on an unprotected outlet.
- **7.** Allow a few minutes for the light to reach full brightness. The inline GFCI **(B)** is equipped with a red indicator light. If the light is on, everything is working properly.

## WARNING:

If you're in an area with

musckrats, use conduit to

protect exposed cables.

All power to the unit must be disconnected during installation. Do not plug in the unit until the light is completely installed.