

HID LED 27W TITANIUM LED SERIES



PRO



27W REPLACES



70-100W
HID

70% Energy Savings

\$182 Savings
per lamp*

- Direct line voltage 120-277V - Not compatible with ballasts
- Designed for use in post top applications
- Compatible with EX39 & E39 sockets
- Fully omnidirectional 320° beam angle
- Available in 3000K & 5000K CCT
- Suitable for use in totally enclosed fixtures



HID LED PRODUCT FEATURES


Suitable for Enclosed Fixtures



This HID LED lamp replaces a 70-100W HID and is suitable for use in totally enclosed fixtures. Its high lumen output and exceptional efficacy make it an ideal choice for outdoor post top applications.


CoolSink Technology

The CoolSink passive cooling system allows air to flow freely through the lamp. This unique design uses an increased cooling surface area to reduce the operating temperature of the LED and power supply, thus resulting in longer lamp life and lumen maintenance.



APPLICATIONS

General Lighting

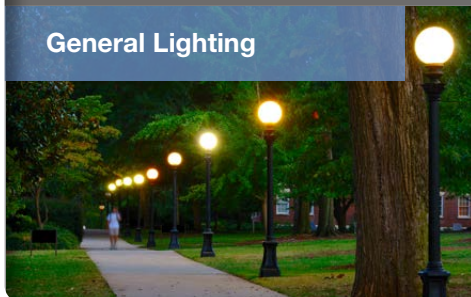

Teardrop Lighting



Post Top Lighting



Ref.:#DS130-HID-LED-27W-277V

SPECIFICATIONS

Product Model	97819 27HID/827/277V/E39 27HID/827/277V/EX39 (MTO)	57935 27HID/830/277V/EX39	57937 27HID/850/277V/EX39	97820 27HID/857/277V/E39 27HID/857/277V/EX39 (MTO)
Type	HID LED	HID LED	HID LED	HID LED
Base	EX39 (Compatible with E39)	EX39 (Compatible with E39)	EX39 (Compatible with E39)	EX39 (Compatible with E39)
Power (W)	27	27	27	27
Voltage - Frequency	100-277V	100-277V	100-277V	100-277V
Color Temp. (ANSI)	Soft White 2700K	Warm White 3000K	Daylight 5000K	Daylight 5700K
CRI (Ra) (typ.)	80	80	80	80
Bare Lamp lumens (lm)	3020	3020	3200	3200
Bare Lamp efficacy (LPW)	112	112	118	118
Fixture lumens (lm)***	1800	1800	1800	1800
Fixture efficacy (LPW)***	67	67	67	67
Beam Angle	320°	320°	320°	320°
Dimmable	No	No	No	No
Power Factor	0.9	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000	50,000
Dia. x MOL	3.66"x8.98" (93x228mm)	3.66"x8.98" (93x228mm)	3.66"x8.98" (93x228mm)	3.66"x8.98" (93x228mm)
Weight (lb. / g)	1.8lbs / 816g	1.8lbs / 816g	1.8lbs / 816g	1.8lbs / 816g

* Savings per fixture based on \$0.11 / kw energy cost, 12 hrs / \$12 HID with 10,000-hr lifetime, \$70 ballast, \$90 LED HID with 50,000 hr lifetime

** Suitable for use in totally enclosed fixtures

*** Fixture lumens and efficacy based on DLC testing in Post Top fixture with prismatic diffuser; GE Patriarch Luminaire

**** Suitable for damp locations. Not for use where directly exposed to weather or water