


Plusrite®

CATALOG NUMBER: BALU70-HX/V4

70W S62

High Pressure Sodium Lamp Ballast
60 Hz HX-HPF

3X4CORE-HX,CWA&CWIUNITS

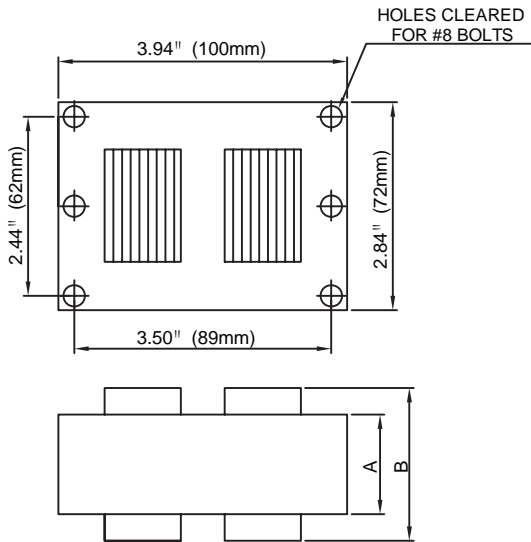

Input Volts		120	208	240	277
Circuit Type	HX-HPF				
REGULATION					
Line Volts	±5%				
Lamp Watts	±10%				
LINE CURRENT(Amps)					
Operating	0.80	0.45	0.40	0.35	
Open Circuit	1.50	0.85	0.75	0.65	
Starting	0.60	0.35	0.30	0.25	
RECOMMENDED FUSE (Amps)					
	4	3	2	2	
TEMPERATURE RATINGS					
Insulation Class	H	H	H	H	
Coil Temperature Code	A	A	A	A	
Benchtop Coil Rise	51.2	49.0	51.0	48.3	
Power Factor (Min)	90%				
Input Watts	90 W				
Current Crest Factor	1.50				
NOM. OPEN CIRCUIT VOLTAGE					
	120				
INPUT VOLTAGE AT LAMP DROPOUT					
	90	160	180	205	
MIN AMBIENT STARTING TEMP					
	-40°F/-40°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,500 V				
Open Circuit Voltage Test (V)					
	105 - 135				
Short Circuit Current Test (A)					
Secondary Current	Min	1.80			
	Max	2.20			
Input Current	Min	0.40	0.25	0.20	0.15
	Max	0.70	0.40	0.35	0.30
CORE and COIL Specifications					
Dimension A (in)	1.50				
Dimension B (in)	2.95				
Weight (lbs)	4.6				
Lead Lengths (in)	12				
CAPACITOR REQUIREMENT					
Microfarads	7.0 uf				
Volts (Min)	280 V				

Capacitor:


Microfarads: 7.0 uf
Volts (Max): 330 V
Case Temp(Max): 100°C
D: 1.38 in
L: 2.76 in
A: 0.63 in

Ignitor:

Temp: 105 °C
BTL : 2 ft




Oil-Filled Capacitor



Wiring Diagram:

RoHS

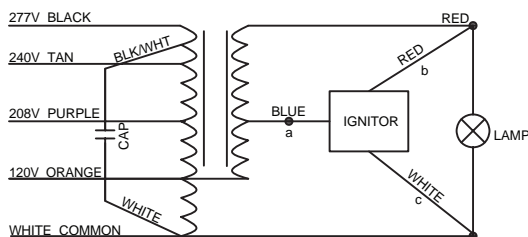

ORDERING INFORMATION

The ballast is prewired comes with a kit including capacitor, ignitor and bracket.

Data is based upon tests performed by Plusrite in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Coil material: Cu/Al