

# PL H 10.5W BYP TITANIUM LED SERIES



10.5W REPLACES



**26W  
CFL**

60% Energy Savings

**PRO**



- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with G24d, GX24d, G24q & GX24q bases**
- ⌚ **Exceptional efficacy 89 LPW**
- ⌚ **Lasts 4 times longer than CFL**
- ⌚ **Compact form factor fits most fixtures**
- ⌚ **Available in 2700K, 3000K, 3500K & 4000K**



40,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)




SEMI DIRECTIONAL



## PL PRODUCT FEATURES

### BYPass Installation

This PL H lamp requires bypassing the ballast during installation and runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

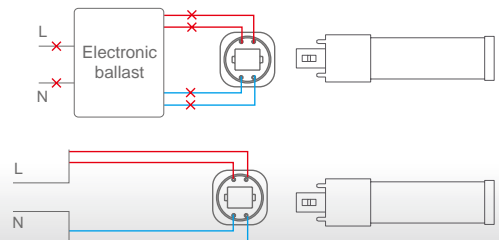

### Adjustable Base



This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

# PL H 10.5W BYP TITANIUM LED SERIES

## APPLICATIONS

### Retail




### Hospitality



### Office



**Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)  
**Voltage:** 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 40,000 hrs  
**Weight:** 0.18lb / 82g

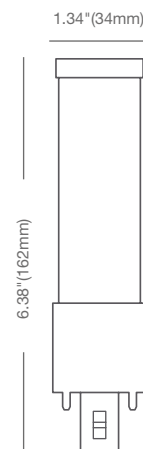

## SPECIFICATIONS\*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
10.5PLH/827/BYP	57906	10.5	Soft White 2700K	80	870	83	110°
10.5PLH/830/BYP	57907	10.5	Warm White 3000K	80	920	88	110°
10.5PLH/835/BYP	57908	10.5	Neutral White 3500K	80	920	88	110°
10.5PLH/840/BYP	57909	10.5	Cool White 4000K	80	935	89	110°

\* Specification data is preliminary and may be subject to change  
 \*\* Suitable for damp locations. Not for use where directly exposed to weather or water  
 \*\*\* Not intended for use in enclosed fixtures  
 \*\*\*\* Full installation guide and more details available on website