

LED-7302/04 10W Horizontal PL Retrofit

SKU (USA)


LED-7302-35A
LED-7302-42A
LED-7304-35A
LED-7304-42A

SKU (Canada) Description

LED-7302-35C G24d 2 pin PL Horizontal 3500K
LED-7302-42C G24d 2 pin PL Horizontal 4200K
LED-7304-35C G24q 4 pin PL Horizontal 3500K
LED-7304-42C G24q 4 pin PL Horizontal 4200K

Technical Specifications

| Models US/CAN | LED-7302-35A/ LED-7302-35C | LED-7302-42A/ LED-7302-42C | LED-7304-35A/ LED-7304-35C | LED-7304-42A/ LED-7304-42C |
|----------------------------|-----------------------------------------|-------------------------------|-------------------------------|-------------------------------|
| CCT | 3500K | 4200K | 3500K | 4200K |
| Power Consumption | 10 watts | | | |
| Replaces | 26w G24q/d CFL | | | |
| Mounting | G24q or d | | | |
| Voltage | 120-277VAC (USA) 120-347VAC (CANADA) | | | |
| LED Type | Samsung #5630 SMD | | | |
| Beam Angle | 120° | | | |
| Dimmable | No | | | |
| Operating Temp | 0°F - +90°F | | | |
| Rated R70 Life | Up to 50,000 Hrs. | | | |
| Warranty | 5 Year Limited* | | | |
| LM79 Specifications | Yes | Yes | Yes | Yes |
| Power (W) | 10.3 | 10.2 | 10.2 | 10.4 |
| CCT | 3567 | 3560 | 4041 | 4031 |
| Light Output | 932 | 1013 | 920 | 1032 |
| Efficacy | 93 | 101 | 93 | 101 |
| THD @ 120V | n/a | n/a | n/a | n/a |
| THD @ 277V | 6.36% | 6.27% | 6.13% | 6.07% |
| PF @ 120V | n/a | n/a | n/a | n/a |
| PF @ 277V | 0.97 | 0.97 | 0.98 | 0.98 |
| CRI: | 83.1 | 83.2 | 86.2 | 86.2 |
| R9 | 12 | 12 | 29 | 29 |
| Duv | -0.001 | -0.001 | -0.001 | -0.001 |
| Packaging | 12 / Master Carton | | | |
| Unit | 2.37" x 2.0" x 6.27" .52 lbs. | | | |
| Master | 10.2" x 7.3" x 7.01" 8.22 lbs. | | | |

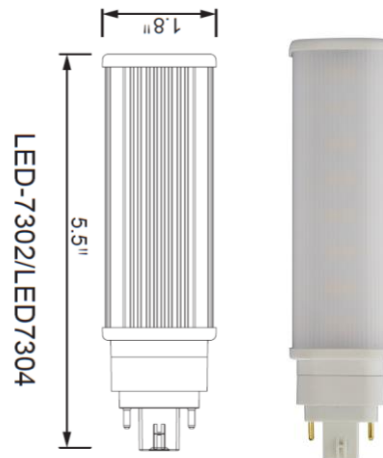

10W
LED for PL
Replaces
26W
PL FL



Description:

10W LED retrofit lamp to replace 26W G24d/q CFL lamps, 2 pin or 4 pin base.

Features:

- 10w power consumption
- 120° Beam angle
- LED-7304-XXA/C replaces: 4 Pin PL: G24q-1, 2, or 3
LED-7302-XXA/C replaces: 2 Pin PL: G24d-2 or 3
- 3500K or 4200K only
- >80 CRI
- 50,000 Rated L70 LED life
- Line Voltage: 120-277V (US "A") or 120-347V (CAN "C" Model)
- Energy Star approve for USA and Canada models
- UL listed
- 5 Year warranty

Installation Notes:

Installing LED-7000 series PL retrofit lamps within recessed CFL fixtures:

- G24q 4 Pin Electronic: **Ballast must be bypassed**
- G24d 2 Pin Magnetic: Ballast may remain in place but higher light output will be achieved with direct voltage (removing ballast)

Note: All specification information falls within a ± 2% range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.