



Wet Location PAR38

The performance you expect from TCP PAR Lamps is now available for wet location applications.

Limitless options for the following applications:


- Outdoor Fixtures
- Landscape Lights
- Security Lights

Great features and benefits:

- Energy Efficient: Up to 80% more energy efficient than halogen alternatives
- UL Wet Location Rated
- Exceeds all industry performance requirements
- Long life: Designed for 25,000 hours (lasts at least 15 times longer than halogen alternative)
- Very durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design



WET LOCATION PAR38

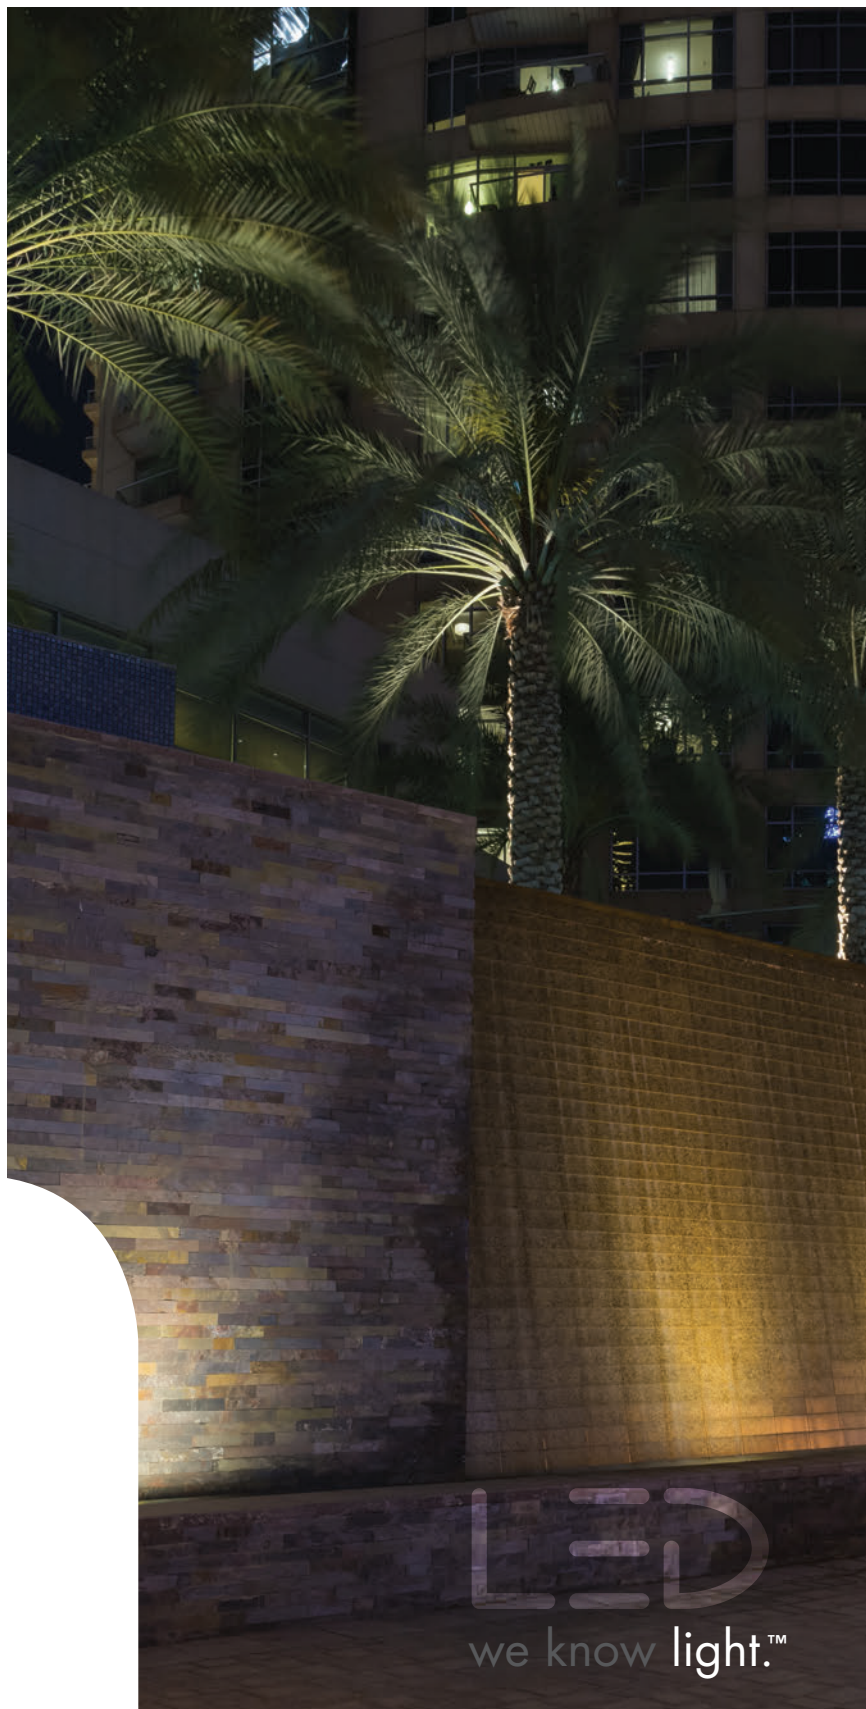

LED
we know light.™





LED PAR38 Wet Location Spec Sheet

LED

Designed for 25,000 Hours average rated life, 120 Volts

Applications:

Ideal for outdoor PAR38 flood and spot light applications.

- + Outdoor Fixtures
- + Landscape Lights
- + Security Lights

Features and Benefits

- Energy Efficient: Up to 80% less energy than halogen alternatives
- UL Wet Location Rated
- Exceeds all industry performance requirements
- Long Life: Designed for 25,000 hours (lasts at least 15 times longer than Halogen alternative)
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design



Specifications

| | PAR38 |
|------------------------|------------|
| Input Line Voltage: | 120 VAC |
| Input Power | 14 W |
| Input Line Frequency | 50/60HZ |
| Lamp Life (Rated) | 25,000 hrs |
| Minimum Starting Temp | -20°C |
| Maximum Operating Temp | 40°C |



WET LOCATION PAR38

**SUITABLE FOR WET LOCATIONS –
WHEN EXPOSED TO WATER USE
ONLY WITH DEVICE BASE UP**

| Warranties and Certificates | Item # | Description | Energy Star | Voltage | Wattage | Incandescent Watt Equivalent | Lumens | LPW | CBCP | Beam Angle | CCT | CRI |
|--------------------------------|---------------|---|-------------|---------|---------|------------------------------|--------|------|------|------------|-------|-----|
| 5 YEAR WARRANTY | | 14W PAR38 3000K | | | | | | | | | | |
| | L14P38D30KFLW | 14W Wet Location Smooth PAR38 - 3000K 40° | | 120 | 14 | 90W | 1000 | 71.4 | 1876 | 40 | 3000K | 82 |
| | | 14W PAR38 5000K | | | | | | | | | | |
| | L14P38D50KFLW | 14W Wet Location Smooth PAR38 - 5000K 40° | | 120 | 14 | 90W | 1100 | 78.6 | 1876 | 40 | 5000K | 82 |

