


# BA-LED

## LEDme® Light Bar

# WAC LIGHTING

Responsible Lighting®

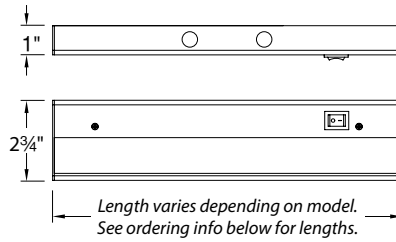

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Bringing out the best in bold, eye-catching residential, retail and commercial displays, LEDme® Light Bars are ideal for counters and cabinets. Thermally efficient, these fixtures are crafted for illuminating heat sensitive perishables and color sensitive apparel, artwork and collectibles.

### FEATURES

- True 1" profile
- Available in 5 lengths
- Each light bar includes one "I" connector
- On center spacing of LEDs is maintained when 2 or more light bars are connected with an "I" connector
- Minimal hardware at ends gives the look of one continuous run
- Free of projected heat, UV and IR radiation
- 70,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Extruded aluminum body with acrylic lens.

**Power:** Integral driver. 120VAC 60Hz input.

**Light Source:** Includes 3000K or 2700K LEDs. CRI: 85. Replacement modules available.

**Dimming:** May be dimmed to 10% with electronic low voltage (ELV) dimmer. Compatible with **LEVITON IPE04** Electronic Low Voltage dimmer




**Finish:** Abrasion resistant Bronze (BB), Satin Nickel (SN) and White (WT) powder coat.

**Standards:** UL & CUL Listed.

### FIXTURE PERFORMANCE

Model #	Color Temp	Power	Lumens	Efficacy
<b>BA-LED2</b>	3000K	3.5W	150	42.9 lm/W
<b>BA-LED4</b>	3000K	6.2W	240	38.7 lm/W
<b>BA-LED6</b>	3000K	8.5W	445	52.4 lm/W
<b>BA-LED8</b>	3000K	12.7W	700	55.1 lm/W
<b>BA-LED10</b>	3000K	13.1W	721	55 lm/W
<b>BA-LED2-27</b>	2700K	3.5W	150	42.9 lm/W
<b>BA-LED4-27</b>	2700K	6W	285	47.5 lm/W
<b>BA-LED6-27</b>	2700K	8.6W	465	54.1 lm/W
<b>BA-LED8-27</b>	2700K	10.9W	585	53.7 lm/W
<b>BA-LED10-27</b>	2700K	13.4W	695	51.9 lm/W

### ACCESSORIES

6' power cord 	<b>BA-PC6-WT</b>	Supplies power in any application.
"I" connector 	<b>BA-I-WT</b>	Interconnection for seamless end to end transitions. One included with each light bar.
Interconnect cable 	<b>BA-IC12-WT</b> 12" <b>BA-IC24-WT</b> 24" <b>BA-IC36-WT</b> 36"	Links two light bars using a single power connection.

### ORDER NUMBER

Model#	Color Temp	Length	Finish
<b>BA-LED</b>	<b>3000K</b>	<b>2</b> 8"	<b>BB</b> Bronze <b>SN</b> Satin Nickel <b>WT</b> White
		<b>4</b> 12"	
		<b>6</b> 18"	
		<b>8</b> 24"	
		<b>10</b> 30"	
<b>BA-LED</b>	<b>2700K</b>	<b>2-27</b> 8"	
		<b>4-27</b> 12"	
		<b>6-27</b> 18"	
		<b>8-27</b> 24"	
		<b>10-27</b> 30"	

### FINISHES



### REPLACEMENT MODULES

		RM2X1-30-BA		RM4X1-30-BA	
BA-LED2	order	1			
BA-LED4				1	
BA-LED6		1	+	1	
BA-LED8				2	
BA-LED10		1	+	2	

**BA-LED** [ ] - [ ]

Example: **BA-LED4-27-WT**

**The total of all connected fixtures should not exceed 4 pieces.**