

# PL H 9.5W DIR TITANIUM LED SERIES



PL:EDGE  
SERIES

PRO



9.5W REPLACES



26W  
CFL

60% Energy Savings

- Easy to install - Plug & Play Direct
- Ballast output power control technology
- Exceptional efficacy 98 LPW
- Dimmable on 0-10V circuits
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K & 4000K CCT



LM 79

LM 80

TM 21



## PL PRODUCT FEATURES

### High Performance - Ballast Smart Control

The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W and 42W CFL PL lamps.

| Ballast Type | Lumens | Bare Lamp |
|--------------|--------|-----------|
| 13W          | 590    | 5.2W      |
| 18W          | 700    | 6W        |
| 26W          | 935    | 9.5W      |

### Adjustable Base




This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

# PL H 9.5W DIR TITANIUM LED SERIES




## APPLICATIONS


### Retail

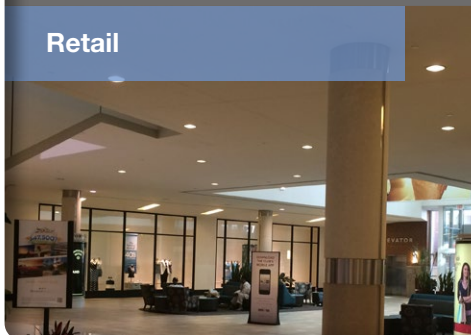

### Hospitality

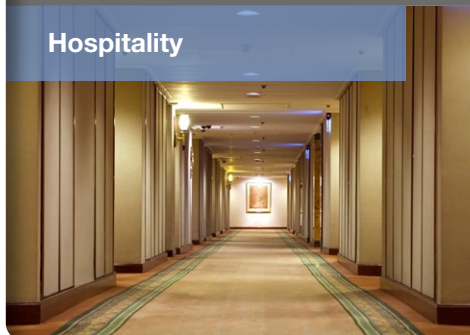


### Office

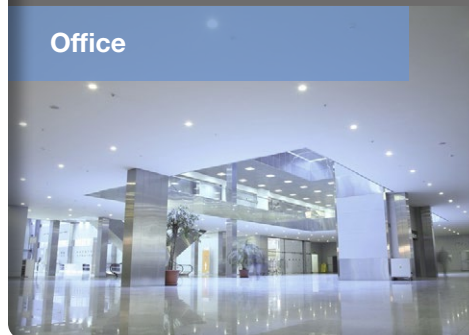

Ref.#. DS157-PLH-9.5W-Dir

**Base:** G24q & GX24q (4-pin CFL)  
**Voltage:** Ballast compatible 120-277V  
**Dimmable:** Yes  
**PF:** 0.9  
**Lifetime:** 40,000 hrs  
**Weight:** 0.18lb / 82g

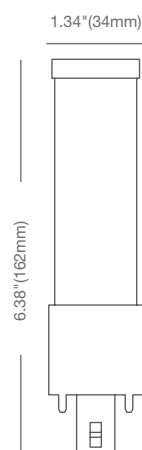

## SPECIFICATIONS\*

| Model          | Product | Power (W) | CCT                 | CRI (typ.) | Lumens | LPW | Beam Angle |
|----------------|---------|-----------|---------------------|------------|--------|-----|------------|
| 9.5PLH/827/DIR | 57899   | 9.5       | Soft White 2700K    | 80         | 870    | 92  | 110°       |
| 9.5PLH/830/DIR | 57900   | 9.5       | Warm White 3000K    | 80         | 920    | 97  | 110°       |
| 9.5PLH/835/DIR | 57901   | 9.5       | Neutral White 3500K | 80         | 920    | 97  | 110°       |
| 9.5PLH/840/DIR | 57902   | 9.5       | Cool White 4000K    | 80         | 935    | 98  | 110°       |

## BALLAST PERFORMANCE

| Ballast Type | Bare Lamp (W) | System (W) | 2700K Lumens | 3000K Lumens | 3500K Lumens | 4000K Lumens |
|--------------|---------------|------------|--------------|--------------|--------------|--------------|
| 13W          | 5.2           | 6.9        | 520          | 540          | 540          | 590          |
| 18W          | 6             | 8          | 620          | 650          | 650          | 700          |
| 26W          | 9.5           | 11.5       | 870          | 920          | 920          | 935          |
| 42W          | 10.4          | 13         | 980          | 1020         | 1020         | 1050         |

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

\* Specification data is preliminary and may be subject to change

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Not intended for use in enclosed fixtures

\*\*\*\* Full installation guide and more details available on website