


Product Specifications

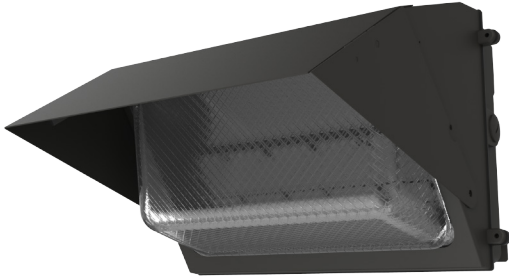

LED Wall Pack

40W LED Wall Pack
EO-WP-40

FEATURES

- System Light Efficacy 81 LPW
- Easy Installation & Maintenance
- IP65
- Five Years Warranty
- ETL
- Optional Shade Included

TYPICAL APPLICATIONS

- Security Lighting
- Pedestrian Lighting

SPECIFICATIONS

PERFORMANCE

LED Chip	OSRAM
Lumen Output (IES)	3,240 lm
Power Consumption	40 W
Efficacy (IES)	81 lm/W
Color Temperature	4300
CRI	≥80
Lumen Maintenance	L70>100,000 hours (Calculated Using TM-21 Calculator)
Input Voltage	100-277 VAC
Power Factor	0.95 minimum

ENVIRONMENTAL

IP Rating	IP65
Operating Temperature	-30 to 45°C (-22 to 113°F)
Storing Temperature	-40 to 80°C (-40 to 167°F)
Humidity	15% to 95% RH

PHYSICAL



Dimensions (L×W×H)	334×234×297mm (13.1×9.2×11.7 in) (SHADED)
Weight	7.13 kg (15.72 lbs) (SHADED)
Mounting Options	Wall Mount
Fixture Material	Aluminum Alloy

WARRANTY


5 Years

Photometrics

NON SHADED



0.0~180.0





Mounting Hight 3m, 0 Tilt,
50LUX-5LUX


Illumination		
Height	Light Spot	LUX
3m	4×4m	99LUX
3.5m	5×5m	75LUX
4m	7×7m	58LUX
4.5m	8×8m	45LUX
5m	10×10m	37.2LUX

Beam Angle (50% max)	120 DEG
Luminous Flux (IES)	3,240 lm
Light Efficacy (IES)	81 lm/W
Cutoff Classification	Semi-Cutoff

SHADED

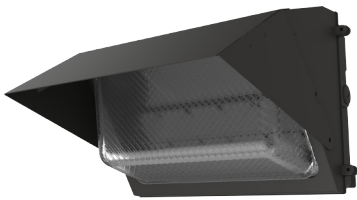

0.0~180.0



Mounting Hight 3m, 0 Tilt,
50LUX-5LUX

Illumination		
Height	Light Spot	LUX
3m	4×4m	99LUX
3.5m	5×5m	75LUX
4m	7×7m	58LUX
4.5m	8×8m	45LUX
5m	10×10m	37.2LUX

Beam Angle (50% max)	120 DEG
Luminous Flux (IES)	3,080 lm
Light Efficacy (IES)	77 lm/W
Cutoff Classification	Full-Cutoff



Mounting Options

Wall Mount

