


## SpringLamp® Compact Fluorescent G10-20 Globes

NPF

### Applications:

Perfect for many incandescent applications.

- + Decorative Fixtures
- + Wall Sconces




### Special Applications Options (Ordering Suffix):


- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K)
- Shatter Resistant (SS) R20 only

### Features and Benefits


- Long life CFL, 8,000 hours average rated life
- Amalgam technology - provides cooler operating temperatures for consistent performance in any position
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium and Candelabra base
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations - use indoors or outdoors
- 12 Month Warranty
- Quickstart technology - fast run up time



1G2002 / 1G2004




1G2002C / 1G2004C



1G1002



1G1002C

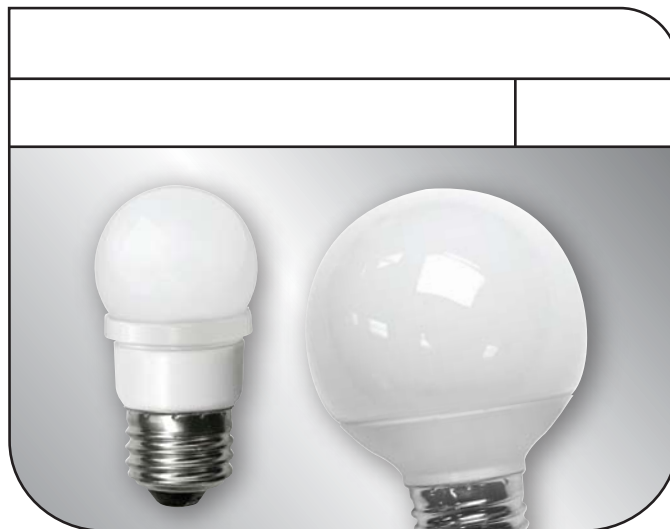

### Specifications

End of Life Protection.....	Yes
Ballast Type .....	Electronic
Starting Method.....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	8,000 Hours
Color Temperature .....	2700°K
Color Rendering Index .....	82
Minimum Starting Temperature .....	-20 ° F
Maximum Operating Temperature .....	160 ° F
U.L. / C.U.L. Listed .....	Yes
FCC Compliance .....	Part 18, Subpart C
Lamp Operating Frequency .....	45 KHZ
Lamp Current Crest Factor .....	< 1.60
Maximum Open Circuit Voltage .....	600V
Power Factor .....	> .50
Total Harmonic Distortion .....	< 150%

### Special Application Notes

- UL approved for wet location in Base Up position only. Base Up position is defined as screw base in a 12:00 position. Any other base position must be in a UL approved weatherproof fixture.

Warranties and Certifications:	Item#	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent	Base Type
 <b>12 MONTH WARRANTY</b> TCP reserves the right to void the warranty for any mis-application of these products.	1G1002	2	10	80	.03A	3.0	1.5	5x	Medium
	1G1002C	2	10	80	.03A	3.0	1.5	5x	Candelabra
	1G2002	2	15	170	.03A	3.4	2.5	5x	Medium
	1G2002C	2	15	170	.03A	3.2	2.5	5x	Candelabra
	1G2004	4	25	200	.07A	3.4	2.5	5x	Medium
	1G2004C	4	25	200	.07A	3.2	2.5	5x	Candelabra

TCP is proud to have been awarded ENERGY STAR® Partner of the Year 2010.



PARTNER OF THE YEAR