

Specification:

| | |
|----------------|----------------------------|
| Lamp Type | White LED 1.3W |
| Battery Backup | 120VAC, 60Hz, 0.037A, 4.4W |
| | 277VAC, 60Hz, 0.016A, 4.4W |
| AC only | 120VAC, 60Hz, 0.023A, 2.5W |
| | 277VAC, 60Hz, 0.010A, 2.5W |
| EM Operation | 90 minutes |


Listings & Certification:



Model: FHCH20



Mechanical Data:

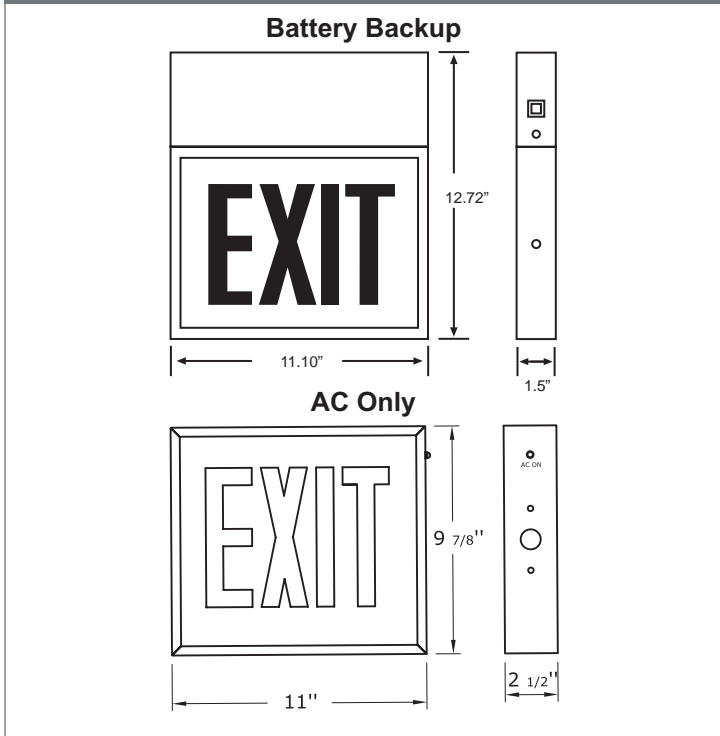

Standard Features:

- Sealed Push-To-Test Switch
- LED Charge Indicator
- NiCd Premium Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Steel Canopy Allows Ceiling Or End Mounting
- Long Life Energy Saving Led Light Source
- Universal Mounting Pattern Knockout In Backplate For J-Box Mounting
- Heat Tempered, Impact Resistant Glass Lens
- Red Silk-Screened Lettering On White Phosphorescent
- White Corrosion-Resistant Polyester Powder Coat Paint
- Sealed Ac Ready Light
- UL listed to UL 924

Ordering Information:

| Base Model No. | Number of Faces | Directional Arrows | Operation |
|----------------|-----------------|--------------------|---------------------|
| FHCH20 | S - Single | LA - Left Arrow | AC - AC Only |
| | | RA - Right Arrow | |
| | D - Double | DA - Double Arrow | EM - Battery Backup |
| | | NA - No Arrow | |

Build part number by adding Base Model No., one of each Number of Faces, Directional Arrows, and Operation codes. Example: FHCH20-S-RA-AC