

Specification:

Lamp Type	White LED 1.3W
Battery Backup	120VAC, 60Hz, 0.037A, 4.4W
	277VAC, 60Hz, 0.016A, 4.4W
AC only	120VAC, 60Hz, 0.023A, 2.5W
	277VAC, 60Hz, 0.010A, 2.5W
EM Operation	90 minutes


Listings & Certification:



Model: FHCH20



Mechanical Data:

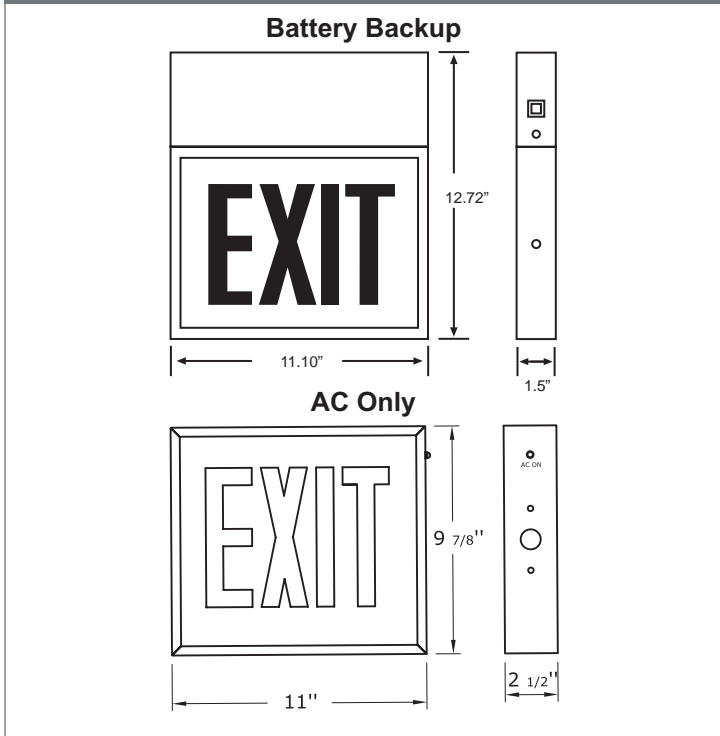

Standard Features:

- Sealed Push-To-Test Switch
- LED Charge Indicator
- NiCd Premium Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Steel Canopy Allows Ceiling Or End Mounting
- Long Life Energy Saving Led Light Source
- Universal Mounting Pattern Knockout In Backplate For J-Box Mounting
- Heat Tempered, Impact Resistant Glass Lens
- Red Silk-Screened Lettering On White Phosphorescent
- White Corrosion-Resistant Polyester Powder Coat Paint
- Sealed Ac Ready Light
- UL listed to UL 924

Ordering Information:

Base Model No.	Number of Faces	Directional Arrows	Operation
FHCH20	S - Single	LA - Left Arrow	AC - AC Only
		RA - Right Arrow	
	D - Double	DA - Double Arrow	EM - Battery Backup
		NA - No Arrow	

Build part number by adding Base Model No., one of each Number of Faces, Directional Arrows, and Operation codes. Example: FHCH20-S-RA-AC