


Specification:	
Lamp Type	White LED 1.3W
Battery Backup	120VAC, 60Hz, 0.037A, 4.4W
	277VAC, 60Hz, 0.016A, 4.4W
AC only	120VAC, 60Hz, 0.023A, 2.5W
	277VAC, 60Hz, 0.010A, 2.5W
EM Operation	90 minutes

Listings & Certification:	

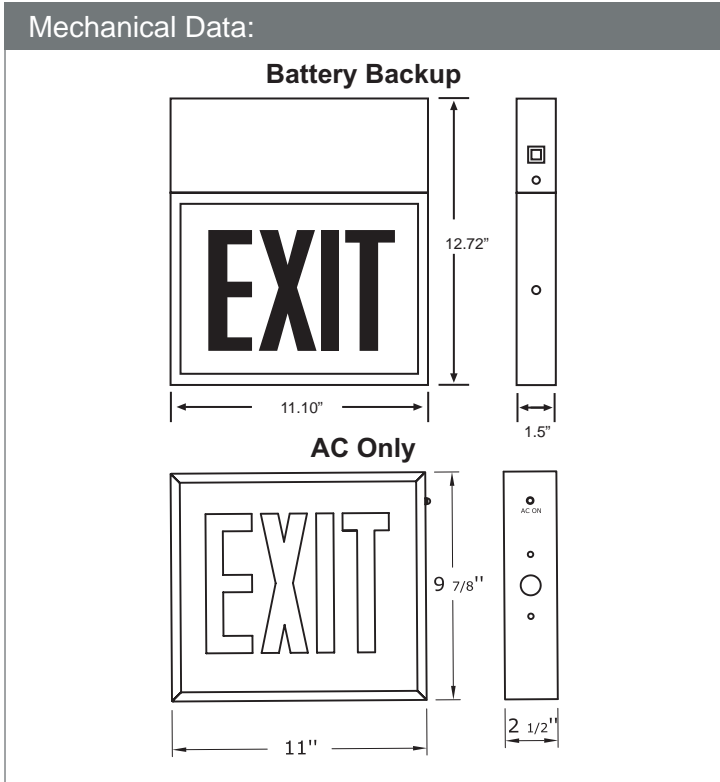

- Standard Features:**
- Sealed Push-To-Test Switch
  - LED Charge Indicator
  - NiCd Premium Battery
  - Dual Voltage 120V/277V
  - Specification Grade Design
  - Steel Canopy Allows Ceiling Or End Mounting
  - Long Life Energy Saving Led Light Source
  - Universal Mounting Pattern Knockout In Backplate For J-Box Mounting
  - Heat Tempered, Impact Resistant Glass Lens
  - Red Silk-Screened Lettering On White Phosphorescent
  - White Corrosion-Resistant Polyester Powder Coat Paint
  - Sealed Ac Ready Light
  - UL listed to UL 924

**Ordering Information:**

Base Model No.	Number of Faces	Directional Arrows	Operation
FHCH20	S - Single	LA - Left Arrow	AC - AC Only
		RA - Right Arrow	
	D - Double	DA - Double Arrow	EM - Battery Backup
		NA - No Arrow	

Build part number by adding Base Model No., one of each Number of Faces, Directional Arrows, and Operation codes. Example: FHCH20-S-RA-AC