

55156

LED 48" VAPOR TIGHT

TECHNICAL DATA SHEET

FEATURES



DIRECT LINEAR AMBIENT LUMINAIRES

- Provides smooth uniform light.
- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures

HOUSING

- 100% UV stabilized polycarbonate housing
- Liquid silicone perimeter gasket
- 100% UV stabilized polycarbonate diffusers eliminates glare and produces even light distribution.
- Polycarbonate clips

MOUNTING

Designed for standard surface mounted.

DIMMING

- 0-10V dimming function, dimming range is 10% - 100%


APPLICATION

Parking garages, cold storage, food processing facilities, dusty and wet environments.

SPECIFICATIONS	
Power Consumption	40W
Input Voltage	120-277V
Power Factor	0.9
Lumens	4977
Luminous Efficiency	125 Lm/W
Color Temperature	5000K
CRI	83
Housing	Polycarbonate
Lens	Frosted Diffuser
Dimensions (Inches)	50.2"(L) x 6.6"(W) x 3.6"(D)
LIFESPAN & ENVIRONMENT	
Average Life	50,000
Operating Temperature	-20°C ~ 50°C



DIMENSIONS

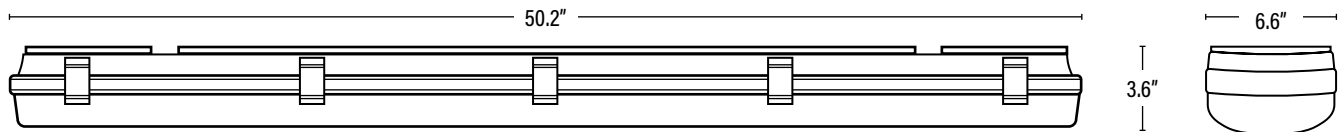

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
55156	LED VAPOR TIGHT 48" 40W/50K/FROSTED LENS/ 120-277V - SUPERIOR LIFE® DLC	40	5000K	4977	83	120-277	50,000	1