



Item#: **PLT-10778**
LED PLL LAMP
 DIRECT WIRE LED LAMP


FEATURES

- Direct wire - no ballast required
- Replaces 40W CFL PLL Lamps
- Simple installation

APPLICATION

This LED lamp is an efficient way to light sockets once traditionally reserved for compact fluorescents.

LIGHT DISTRIBUTION CURVE

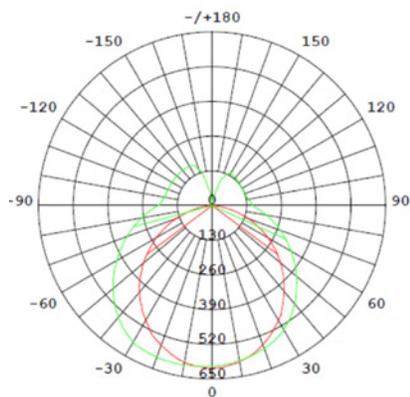

ELECTRICAL

Wattage	23W
Voltage	120-277V
Current	209mA
Power Factor	0.9
Total Harmonic Distortion (THD)	N/A

LIGHTING PERFORMANCE

Lumens	2800
Lumens Per Watt (Lm/W)	122
Color Temperature (CCT)	5000K
Color Rendering (CRI)	82
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	115°
Light Distribution	Type III, Very Short
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Type	Open (*See note on page 2)

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Everlight
------------------	-----------

CONSTRUCTION

Housing	Glass / PC
Lens	Frost
Base / Power Supply	2G11 / Plug In

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly.


Item#: **PLT-10778**

LED PLL LAMP

DIMENSIONS (Inches)

Length (MOL)	22.5"
Width/Diameter (MOD)	0.7"
Height	1.6"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

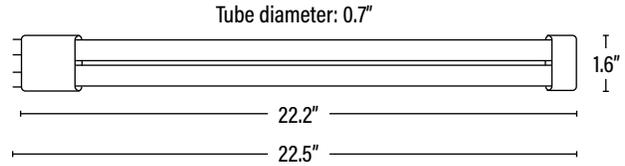

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	50	10811768027652	24.8" x 14.8" x 12.2"	26
Individual Box	10	811768027655	22.9" x 1.8" x 1.1"	0.5
Country of Origin	China			
HS Tariff	9405.40.8200			

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-10778	LED PLL 23WT5/115°/FR/50K//2G11/120-277V - DLC	50

ADDITIONAL INFORMATION:

*It was originally thought this lamp was suitable for totally enclosed fixtures. After live aging and further evaluation, it has been determined excessive heat may cause the lamp not to function properly. Therefore it is not recommended to be used in totally enclosed fixtures.