

PLT-20019

LED 2 x 4 2L TROFFER

TECHNICAL DATA SHEET

FEATURES



- Troffer is ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.
- Low-profile which meets limitless range of applications.
- Compatible with today's popular ceiling system.
- Use 30% less energy than a linear fluorescent troffer

HOUSING

- Die formed of 24 gauge galvanized steel, rigidly fabricated
- Smooth edges for easy handling
- No exposed fasteners
- Clear prismatic acrylic diffuser
- Door hinges are either side for easy re-lamping
- Positive locking cam action latches with matching finish

WIRING

LED ready with non-shunted sockets.

MOUNTING

- Recessed ceiling mount
- Exposed T-grid ceiling


APPLICATION

Office, retail, commercial buildings and work areas.

SPECIFICATIONS

Lamp Type	LED T8
Input Voltage	No Ballast
Construction	24 Gauge Steel
Finish	High Gloss Baked Enamel
Dimension (Inches)	48"(L) x 24"(W) x 3.3"(H)

DIMENSIONS

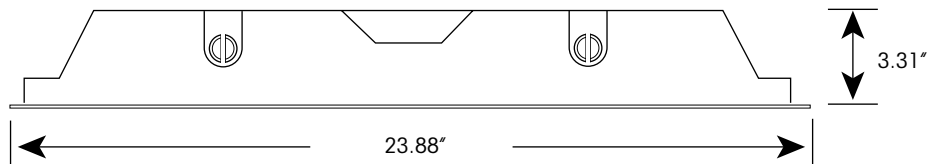

ORDERING

ITEM#	DESCRIPTION	LAMP	NO. OF LAMPS	CASE
PLT-20019	LED 2 X 4 TROFFER FOR 2 T8	T8	2	1