



Item#: **PLT-20022**
LED 2x4 18 CELL PARABOLIC
INDOOR FIXTURE

FEATURES

- High efficiency with excellent glare control
- Use 30% less energy than a traditional fluorescent fixture
- Die formed and rigidly fabricated
- Mechanical light trap prevents light leaks
- Door frame; concealed 22 gauge frame with integral hinges, and a spring steel latch
- Four corner tie points for safety wire support; when required
- LED ready with non-shunted sockets
- Type G - Grid ceilings, grid lock tab integral with both end plates

APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

ELECTRICAL

Lamp Type (not included)	T8
Number of Lamps	3
Voltage	120-277V

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Warranty (Years)	2
------------------	----------

CONSTRUCTIONS

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Parabolic Louver	Anodized Aluminum
Finish	High Gloss Baked White Enamel

CERTIFICATIONS




Operating temperature may vary depending on lamps used.

Item#: **55050**
LED 2x4 18 CELL PARABOLIC

DIMENSIONS (Inches)

Length	48"
Width/Diameter	23.6"
Height	4.7"
Weight (Lbs)	--

Line drawings may not be to scale and are for general reference only.

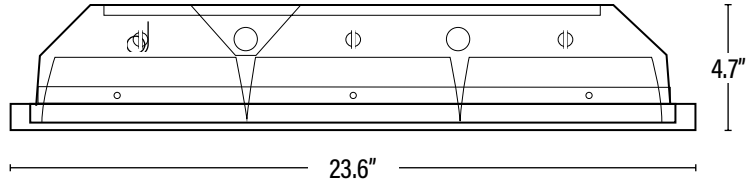

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768025231	--	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
PLT-20022	LED 2x4 18 CELL PARABOLIC 3/T8 - SUPERIOR LIFE®	1