

# PLT-20025

## LED DIAMOND HIGH BAY™ 8L

### TECHNICAL DATA SHEET

#### FEATURES



- Use 30% less energy than a traditional fluorescent fixture.
- A high performance reflector maximizes light output from eight T8 lamps.
- Angled back and flange-less sides diminish dust build-up on the housing.

#### HOUSING

22 gauge cold rolled steel. All steel surfaces are painted after fabrication with high gloss baked enamel applied over iron phosphate pre-treatment for maximum adhesion and rust resistance.

#### REFLECTOR

86% total reflectance, segmented optics utilizing specular aluminum.

#### WIRING

LED ready with non-shunted sockets.

#### MOUNTING

Designed for pendant or chain mounting, adjustable cable. Sufficient knockouts are provided on ends and back to accommodate multiple mounting configurations

#### ACCESSORIES



Occupancy sensors and lens covers available.

#### APPLICATION

Larger warehouses, retail applications, commercial buildings and work areas.

| SPECIFICATIONS     |                               |
|--------------------|-------------------------------|
| Lamp Type          | LED T8                        |
| Input Voltage      | No Ballast                    |
| Construction       | 22 Gauge C.R.S                |
| Finish             | High Gloss Baked Enamel       |
| Reflector          | 86% MRO4 Aluminum             |
| Dimension (Inches) | 48.1"(L) x 22.7"(W) x 7.9"(H) |

#### DIMENSIONS

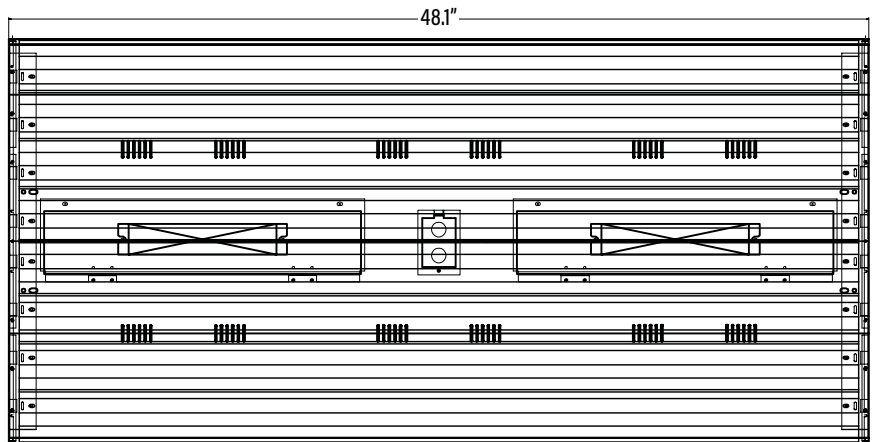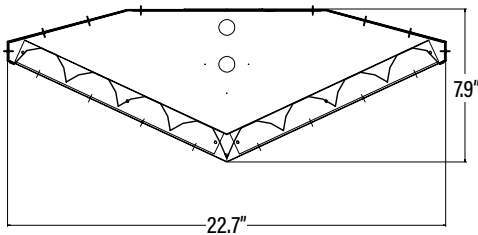

#### ORDERING

| ITEM#     | DESCRIPTION                    | LAMP | NO. OF LAMPS | CASE |
|-----------|--------------------------------|------|--------------|------|
| PLT-20025 | LED DIAMOND HIGH BAY™ FOR 8 T8 | T8   | 8            | 1    |