

55154

LED 1 X 4 LOUVERED HIGH BAY/104W

TECHNICAL DATA SHEET

FEATURES



HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

- Provides smooth uniform light.
- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures

HOUSING

- Die fomed 24 gauge cold rolled steel.
- All steel surfaces are painted after fabrication with high gloss baked white matte powder paint.

MOUNTING

Designed for pendant, chain mounting or adjustable cable.


DIMMING

- 0-10V dimming function, dimming range is 10% - 100% APPLICATION
- Larger warehouses, retail applications, commercial buildings and work areas.

SPECIFICATIONS	
Power Consumption	104W
Input Voltage	120-277V
Power Factor	0.9
THD	20%
Lumens	11290
Luminous Efficiency	107 Lm/W
Color Temperature	4000K
CRI	83
Housing	24 Gauge Steel
Finish	White
Dimensions (Inches)	48.1"(L) x 9.8"(W) x 4.2"(D)
LIFESPAN & ENVIRONMENT	
Average Life	50,000



DIMENSIONS

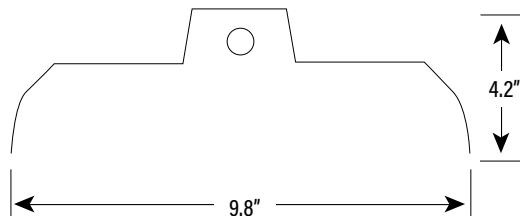

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
55154	LED 1x4 LOUVERED HIGH BAY/104W/40K/120-277V/DIMMABLE - SUPERIOR LIFE® DLC	104	4000K	11290	83	120-277	50,000	1