

PLT-20045

LED FLAT 4' HIGH BAY/220W

TECHNICAL DATA SHEET

FEATURES



HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS

- Provides smooth uniform light.
- Low-profile which meets limitless range of applications.
- Use 30% less energy than a linear fluorescent fixtures

HOUSING

- Die formed 24 gauge cold rolled steel.
- All steel surfaces are painted after fabrication with high gloss baked white matte powder paint.

MOUNTING

Designed for pendant, chain mounting or adjustable cable.

DIMMING

- 0-10V dimming function, dimming range is 10% - 100%

APPLICATION

Larger warehouses, retail applications, commercial buildings and work areas.




SPECIFICATIONS

Power Consumption	220W
Input Voltage	120-277V
Power Factor	0.9
THD	9.2%
Lumens	26730
Luminous Efficiency	122 Lm/W
Color Temperature	5000K
CRI	80
Beam Angle	120°
Housing	24 Gauge Steel
Finish	White
Dimensions (Inches)	45.9"(L) x 12.6"(W) x 3.6"(D)

LIFESPAN & ENVIRONMENT

Average Life	50,000
Operating Temperature	-20°C ~ 50°C

DIMENSIONS

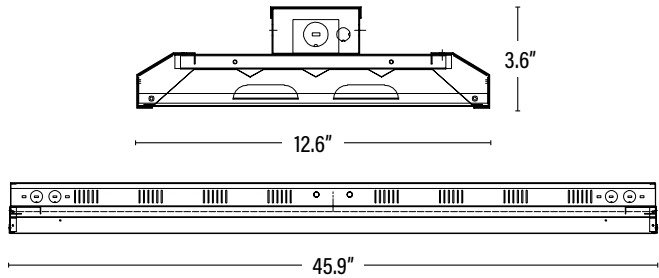

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
PLT-20045	LED FLAT 4' HIGH BAY 220W/5000K/FROSTED LENS/DIMMABLE	220	5000K	26730	80	120-277	50,000	1
	DLC WIRE GUARD ACCESSORY (as shown in image above)							
PLT-20046	WIRE GUARD FOR LED FLAT 4' HIGH BAY 220W							1