

55144

LED 8" WRAP A-ROUND

TECHNICAL DATA SHEET

FEATURES



SPECIFICATIONS

Power Consumption	40W
Input Voltage	120-277V
Power Factor	0.9
THD	<20%
Lumens	4564
Luminous Efficiency	116 Lm/W
Color Temperature	5000K
CRI	82
Housing	24 Gauge Steel
Lens	Prismatic Lens
Finish	White
Dimensions (Inches)	48.7"(L) x 6.5"(W) x 2.5"(H)
LIFESPAN & ENVIRONMENT	
Average Life	50,000
Operating Temperature	-20°C ~ 50°C

DIRECT LINEAR AMBIENT LUMINAIRES

- Low-profile which meets limitless range of applications.
- Use 30% less energy than a traditional fluorescent fixture

HOUSING

- Die formed of 24 gauge galvanized steel, rigidly fabricated.
- Standard knocks on back and ends.
- All steel surfaces are painted after fabrication with high gloss baked white matte powder paint.
- Low-glare prismatic lens

MOUNTING

- Surface, Pendant and Suspended Mounting

DIMMING


- 0-10V dimming function, dimming range is 10% - 100%

APPLICATION

Stairways, Bathrooms and low light traffic areas.



DIMENSIONS

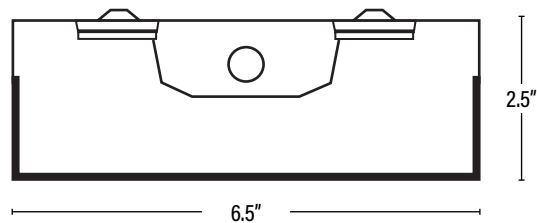

ORDERING

ITEM#	DESCRIPTION	WATTS	COLOR	LUMENS	CRI	VOLTS	HOURS	CASE
55144	LED WRAP A-ROUND 8" 40W/50K/FROSTED/120-277V/DIMMABLE - SUPERIOR LIFE® DLC	40	5000K	4564	82	120-277	50,000	1