



GREENCREATIVE

Bringing You the Latest in LED Technology



2015 SPRING PRODUCT CATALOG



GREENCREATIVE

GREEN CREATIVE is a 5-year-old solid state lighting development and manufacturing company based in Silicon Valley, CA. The company offers a comprehensive line of high-performance LED lighting solutions which has been widely adopted by some of the largest companies in the world.



Bringing you the latest in LED technology


Anchored by strong integrated R&D capabilities, GREEN CREATIVE innovation, performance and reliability have been recognized year after year by the Illuminating Engineering Society Progress Report and the LEDs Magazine Sapphire Awards.




A complete line with national distribution

GREEN CREATIVE's full product line of ENERGY STAR, DLC and CEC certified indoor retrofit and new construction lighting solutions serves the Retail, Hospitality, Food & Beverage, Office and Education industries through multiple distribution centers and sales networks across the USA.

GREEN CREATIVE FULL PRODUCT FAMILY

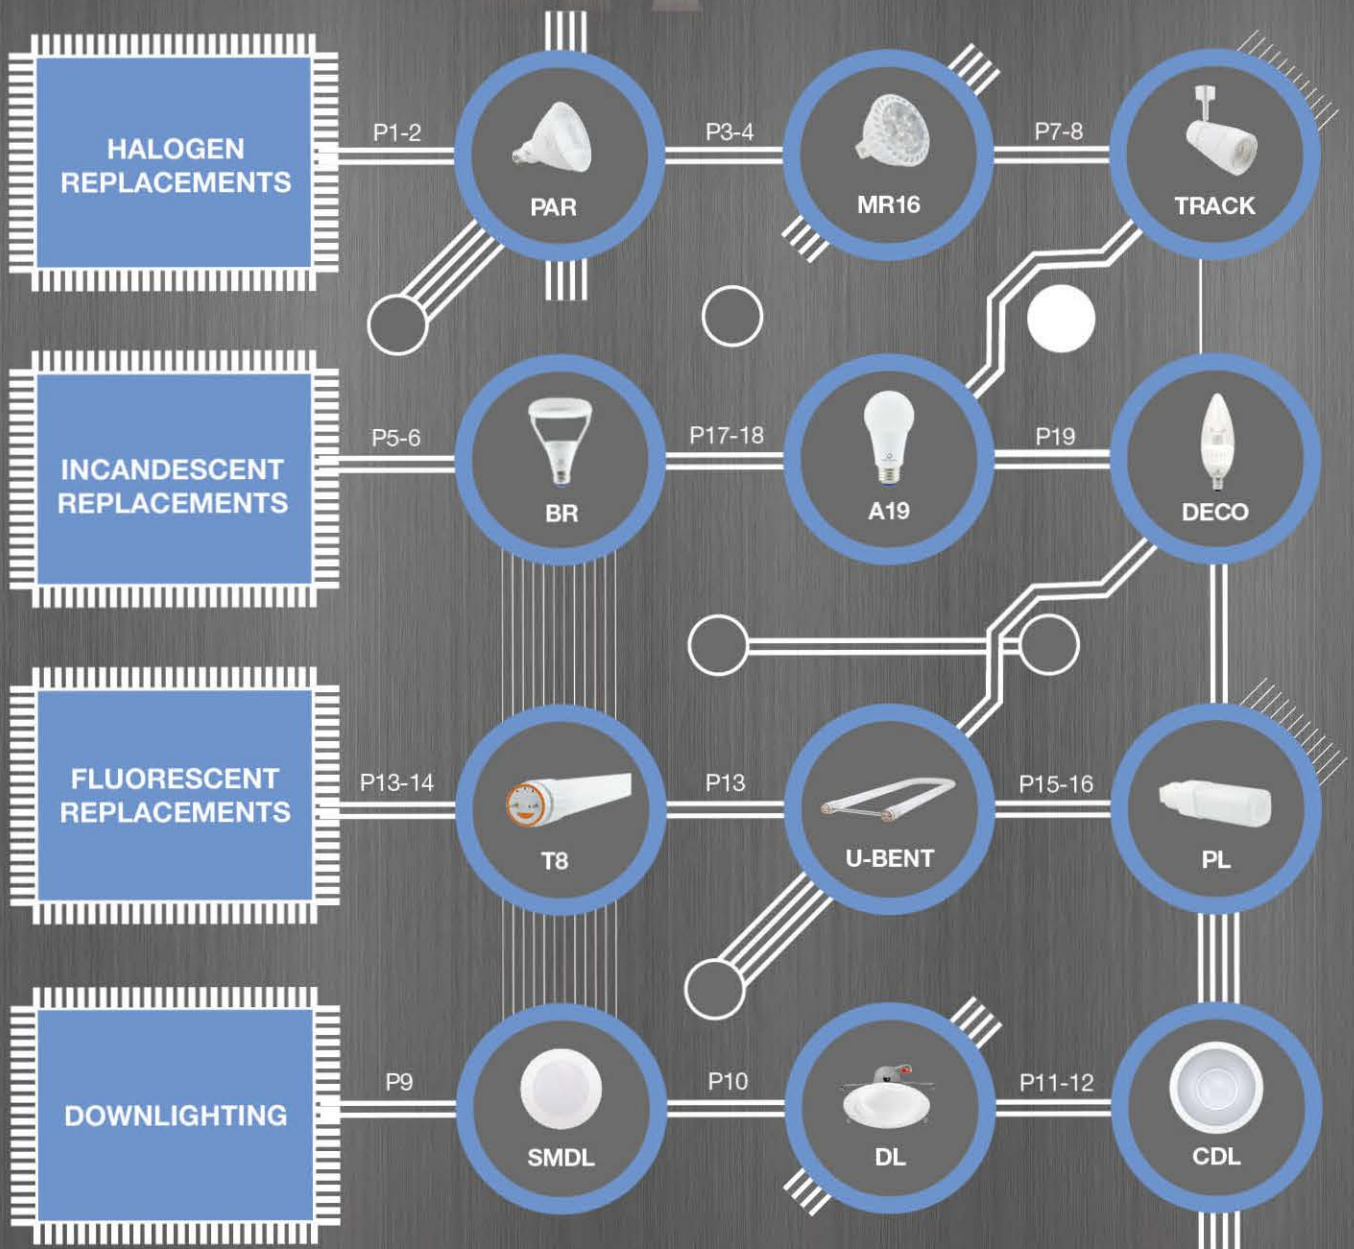

PAR LINE TITANIUM LED SERIES



SPECIFICATIONS*

	Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CBCP (cd)	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.	
	18.5PAR38G4DIM/927SP15	16147	2700K	950	100W	51	15°	10,500	90	Yes	40,000	120V	Yes	June
	18.5PAR38G4DIM/927NF25	16148	2700K	950	120W	51	25°	5390	90	Yes	40,000	120V	Yes	June
	17PAR38G4DIM/927FL40	16149	2700K	1105	120W	65	40°	2400	90	Yes	40,000	120V	Yes	June
	18.5PAR38G4DIM/930SP15 •	16150	3000K	1000	100W	54	15°	11,000	90	Yes	40,000	120V	Yes	June
	18.5PAR38G4DIM/930NF25 •	16151	3000K	1000	120W	54	25°	5400	90	Yes	40,000	120V	Yes	June
	17PAR38G4DIM/930FL40 •	16152	3000K	1150	120W	68	40°	2500	90	Yes	40,000	120V	Yes	June
	17PAR38G4DIM/940FL40	16155	4000K	1200	120W	71	40°	2650	90	Yes	40,000	120V	Yes	June
	17PAR38G4/930FL40/277V	16161	3000K	1150	120W	68	40°	2500	90	No	40,000	120-277V	Yes	June
	17PAR38G4/940FL40/277V	16164	4000K	1200	120W	71	40°	2650	90	No	40,000	120-277V	Yes	June
	17PAR38G4DIM/927FL40/GU24	16303	2700K	1105	120W	65	40°	2400	90	Yes	40,000	120V	Yes	June
	17PAR38G4DIM/930FL40/GU24	16306	3000K	1150	120W	68	40°	2500	90	Yes	40,000	120V	Yes	June
	14.5PAR30G4DIM/927SP15	16111	2700K	725	75W	50	15°	6155	90	Yes	40,000	120V	Yes	June
	12.5PAR30G4DIM/927NF25	16112	2700K	815	75W	65	25°	3350	90	Yes	40,000	120V	Yes	June
	12.5PAR30G4DIM/927FL40	16113	2700K	815	75W	65	40°	1750	90	Yes	40,000	120V	Yes	June
	14.5 PAR30G4DIM/930SP15 •	16114	3000K	760	75W	52	15°	6250	90	Yes	40,000	120V	Yes	June
	12.5PAR30G4DIM/930NF25 •	16115	3000K	850	75W	68	25°	3600	90	Yes	40,000	120V	Yes	June
	12.5PAR30G4DIM/930FL40 •	16116	3000K	850	75W	68	40°	1850	90	Yes	40,000	120V	Yes	June
	12.5PAR30G4DIM/940FL40	16119	4000K	900	75W	72	40°	2050	90	Yes	40,000	120V	Yes	June

* Specification data is preliminary and may be subject to change

** All PAR models are suitable for use in wet locations

• For Black versions, add /B to the model number (Ex. 12.5PAR30G4DIM/930/NF25/B)