





## JDR / MR16 CFL

### JDR Type GU10 Base Reflector CFL

Nominal Wattage	Model #	Item Description & CCT	Initial Lumen	Average Rated Life (Hrs.)	Diameter (Inches/mm)	Length/ (Inches/mm)	Pack Master	Item #
11	11W/ODJDR	11W JDR Reflector CFL GU10 Base-Soft White	250	10000	2.0 / 50	3.2 / 80	24	076
11	11W/ODJDR/41K	11W JDR Reflector CFL GU10 Base-Cool White	250	10000	2.0 / 50	3.2 / 80	24	090
11	11W/ODJDR/50K	11W JDR Reflector CFL GU10 Base-Natural DL	250	10000	2.0 / 50	3.2 / 80	24	142
9	9W/ODMR16	9W MR 16 CFL GU5.3 Base-Soft White	230	10000	2.1 / 54	2.8 / 71	24	178
9	9W/ODMR16/41K	9W MR 16 CFL GU5.3 Base-Cool White	230	10000	2.1 / 54	2.8 / 71	24	179
9	9W/ODMR16/50K	9W MR 16 CFL GU5.3 Base-Natural DL White	230	10000	2.1 / 54	2.8 / 71	24	180

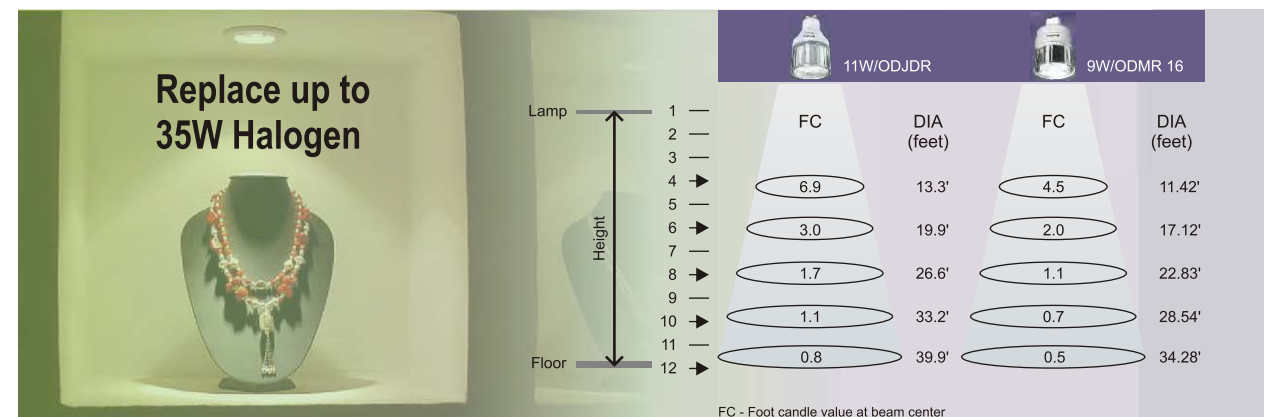

#### Applications



RECESSED CANS

TRACK LIGHTING

#### Features

- 10,000 hour average rated life reduces relamping & related costs
- Rare earth tri-phosphor with 80 plus CRI for better performance
- High Luminous Efficacy
- 75% Lower Power Consumption over incandescent bulbs
- Available in various color temperature

#### Notes

- Not Dimmable
- Available in other color temperature also (upon request)
- Dimension with + 0.1 inch tolerance

