

|              |
|--------------|
| Type         |
| Project      |
| Catalog No.  |
| Lamp/Wattage |

**NU Mini Inch Fluorescent**  
**Low Profile T5 Fluorescent Under Cabinet Series**  
 Lamp: Various T5 (Included with Fixtures)

**PRODUCT DESCRIPTION**

T5 Fluorescent under cabinet lighting fixtures ranging in lengths from 12" to 42" and 8 to 26 watts. The NU series of under cabinet light fixtures are only 1" tall.

**LAMPS**

|              |                                   |
|--------------|-----------------------------------|
| <b>NU-12</b> | (1) 8W F8T5/CW                    |
| <b>NU-21</b> | (1) 13W F13T5/CW                  |
| <b>NU-24</b> | (2) 8W F8T5/CW                    |
| <b>NU-32</b> | (1) 8W F8T5/CW & (1) 13W F13T5/CW |
| <b>NU-42</b> | (2) 13W F13T5/CW                  |

**FEATURES**

- Solid state FCC 18A Compliant
- Post painted no exposed raw edges
- Die -formed housing of cold rolled steel
- Solid state electronic ballast
- 5 Sizes ranging 12-1/4" - 42-1/2"
- One piece extruded diffuser with UV resistors
- Finished in baked white enamel
- Knockouts provided on the top corner for on-off switch and outlet installation
- Knockouts provided at the side, back and rear for easy installation
- Suitable for individual or continuous rows
- Flicker-free startup
- High performance, cool operation
- Instant and easy installation
- UL and cULus Listed

**HOUSING**

Die formed 0.040" cold rolled steel, 2-piece housing. Housing contains two 1/2" and 5/8" knockouts on bottom and side surfaces for easy access to wiring.

**MOUNTING**

Two (2) mounting screws provided for installation into wood surface via two keyhole slots located in the back of the fixture housing.

**ELECTRICAL**


Socket plate contains socket(s) to accept bi-pin T5 fluorescent light source (optional). Fixture is pre-wired for immediate hardwire connection to 120V power source. Integral Class-P, 120V electronic ballast for efficient operation. Includes Romex® connector.

**LABELS AND LISTINGS**

cULus Listed  
 FCC Part 18A



**DIMENSIONS**

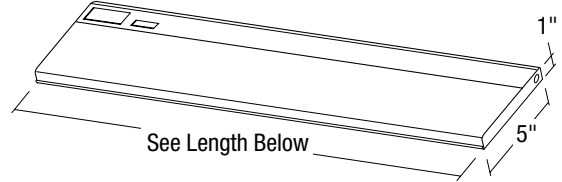

|                |                 |
|----------------|-----------------|
| <b>NULS-8</b>  | Length: 12-1/4" |
| <b>NULS-13</b> | Length: 21-1/4" |
| <b>NULS-18</b> | Length: 24-1/4" |
| <b>NULS-21</b> | Length: 33-1/2" |
| <b>NULS-24</b> | Length: 42-1/2" |

**Low Profile T5 Fluorescent Under Cabinet Fixture**

| Catalog No. | Wattage / Length               |
|-------------|--------------------------------|
| <b>NU-</b>  |                                |
| <b>12</b>   | = 12-1/4" (1) F8T5             |
| <b>21</b>   | = 21-1/4" (1) F13T5            |
| <b>24</b>   | = 24-1/2" (2) F8T5             |
| <b>32</b>   | = 33-1/2" (1) F8T5 & (1) F13T5 |
| <b>42</b>   | = 42-1/2" (2) F13T5            |

**Accessories**

|        |                                  |
|--------|----------------------------------|
| NUL-12 | Replacement Lens for NU-12       |
| NUL-21 | Replacement Lens for NU-21       |
| NUL-24 | Replacement Lens for NU-24       |
| NUL-32 | Replacement Lens for NU-32       |
| NUL-42 | Replacement Lens for NU-42       |
| NUO-01 | Grounded Convenience Outlet, 15A |
| NUR-01 | Rocker Switch                    |

Create a complete Catalog Item number: Example: NU - 12