

# A19 9W DIM. GU24 TITANIUM LED SERIES



PRO



9W REPLACES



**13W  
CFL**

35% Energy Savings


- ⌚ **Omnidirectional: 300° beam angle**
- ⌚ **Exceptional efficacy 89 LPW in Warm White**
- ⌚ **35% more energy savings than CFL**
- ⌚ **Comfortable warm diffused light**
- ⌚ **Natural A-lamp shape fits all applications**
- ⌚ **Compact form factor, fits most fixtures**




## A19 PRODUCT FEATURES

### Omnidirectional Lighting

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 300° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



### Exceptional Efficacy

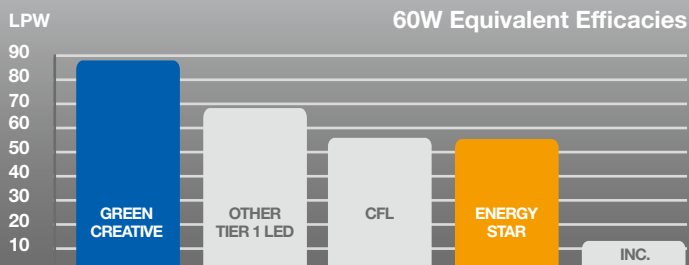

At 89 LPW, this lamp's efficacy is more than 30% higher than the Tier 1 LED A19 60W equivalent industry average and exceeds new ENERGY STAR requirements by upwards of 55%. This energy saving performance makes this lamp a smart retrofit choice for CFL bulbs.

# A19 9W GU24 DIM. TITANIUM LED SERIES

## APPLICATIONS

### General Lighting



### Downlighting



### Uplighting



Ref.#: DS113-A19-9W-GU24

## SPECIFICATIONS

Product Model	57831 9A19DIM/827/GU24	57832 9A19DIM/830/GU24	57833 9A19DIM/840/GU24
Type	A19	A19	A19
Base	GU24	GU24	GU24
Power (W)	9	9	9
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Soft White 2700K	Warm White 3000K	Cool White 4000K
CRI (Ra) (typ.)	80	80	80
Typical lumens (lm)	800	800	850
Efficacy (LPW)	89	89	94
Beam Angle	300°	300°	300°
Dimmable	Yes**	Yes**	Yes**
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	25,000	25,000	25,000
Dia. x MOL	2.36"x4.17"(60x106mm)	2.36"x4.17"(60x106mm)	2.36"x4.17"(60x106mm)
Weight (lb. / g)	0.17lb / 78g	0.17lb / 78g	0.17lb / 78g

\* Not intended for use in totally enclosed fixtures

\*\* List of tested dimmer switches available on website

\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water