


PAR REFLECTOR INDOOR/OUTDOOR CFL

PAR20 / PAR30 / PAR38 Outdoor / Indoor Reflector CFL Hard Glass


Nominal Wattage	Overdrive Model #	Item Description & CCT	Initial Lumen	Average Rated Life (Hrs.)	Diameter (Inches/mm)	Length/ (Inches/mm)	Pack Master	Item #
11	11WODPAR20	11W PAR20 Reflector- CFL-Soft White	380	10,000	2.5 / 63	3.9 / 98	12	071
11	11WODPAR20/41K	11W PAR20 Reflector- CFL-Cool White	380	10,000	2.5 / 63	3.9 / 98	12	155
11	11WODPAR20/50K	11W PAR20 Reflector- CFL-Natural DL	380	10,000	2.5 / 63	3.9 / 98	12	089
15	● 15WODPAR30	15W PAR30 Reflector- CFL-Soft White	700	10,000	3.7 / 95	4.6 / 117	12	072
15	● 15WODPAR30/41K	15W PAR30 Reflector- CFL-Cool White	700	10,000	3.7 / 95	4.6 / 117	12	156
15	15WODPAR30/50K	15W PAR30 Reflector- CFL-Natural DL	700	10,000	3.7 / 95	4.6 / 117	12	091
23	23WODPAR38	23W PAR38 Reflector- CFL-Soft White	1,100	10,000	4.8 / 121	5.0 / 128	12	073
23	● 23WODPAR38/41K	23W PAR38 Reflector- CFL-Cool White	1,100	10,000	4.8 / 121	5.0 / 128	12	144
23	23WODPAR38/50K	23W PAR38 Reflector- CFL-Natural DL	1,100	10,000	4.8 / 121	5.0 / 128	12	087

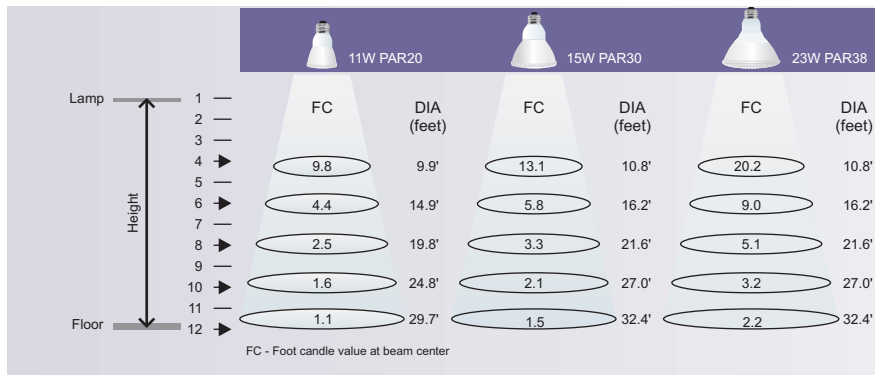

Applications



PENDANT FIXTURES



RECESSED CANS



TRACK LIGHTING

Features

- 10,000 hour average rated life reduces relamping & related costs
- Rare earth tri-phosphor with 80 plus CRI for better performance
- High Luminous Efficacy
- 75% Lower Power Consumption over incandescent bulbs
- Available in various color temperature
- Compact in Size and fits most applications

Notes

- Not Dimmable
- Available in other color temperature also (upon request)
- Dimension with + 0.1 inch tolerance
- 23W ODPAR38 Model same size as Halogen PAR 38
- Use is not recommended when exposed to weather, outdoor usage requires an enclosed fixture
- Base up operator for outdoor fixture

