



## Compact Fluorescent

### Applications:

**Perfect for most applications:** Use where a standard incandescent is used.

- + Table Lamps
- + Floor Lamps
- + Ceiling Fixtures
- + Wall Sconces
- + Vanities
- + Track Lighting




### Features and Benefits:

- Long life, 10,000 hour average rated life – SpringLamps®
- 8,000 hour average rated life – globes/a-lamp/floodlights
- Lasts 9 years, based on 3 hours use per day – SpringLamps®
- Lasts 7 years, based on 3 hours use per day – globes/a-lamp/floodlights
- Replace less often, ideal for hard to reach places
- Lower maintenance costs for lamp replacements
- Saves up to 75% in energy costs compared to similar light output incandescent lamps
- Available in the following color temperatures: 2700K, 3500K, 4100K and 5000K
- Quick run-up time
- Medium base and compact height fits anywhere a standard incandescent fits
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance
- Up to 23 watts approved for enclosed fixtures

Catalog Number

Notes

Type

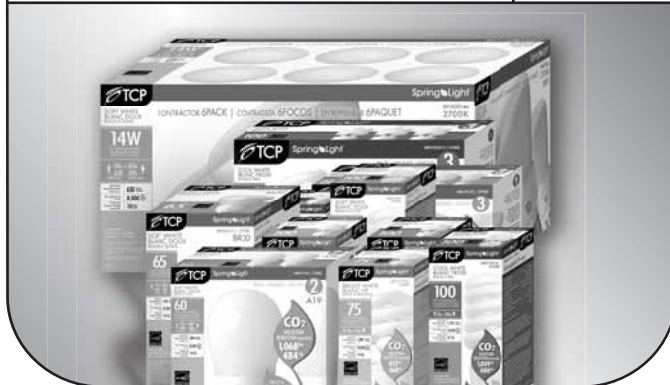

### Specifications: ( at full brightness )

End of Life Protection .....	Yes
Ballast Type .....	Electronic
Starting Method .....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	10,000 Hours / 8,000 Hours
Color Temperature .....	2700°K
Color Rendering Index .....	82
Minimum Starting Temperature .....	-20°F, -29°C
Maximum Operating Temperature .....	160°F, 71°C
U.L. / C.U.L. Listed .....	Yes
FCC Compliance .....	47 C.F.R. Part 18
Lamp Operating Frequency .....	45 KHZ
Lamp Current Crest Factor .....	<1.60
Max. Open Circuit Voltage .....	600V
Total Harmonic Distortion .....	<150%
Power Factor Rated .....	>.50

### Special Application Notes:

Up to 23 watt is UL approved for totally enclosed fixtures.

Use a 27 watt in an open recessed can.



801009

801014

801019

801023

801027

807009

807014

806009

806014

802014

803014

804023

805023



## Meeting Your Needs.

SpringLight™ is our basic standard CFL lineup which includes half SpringLamps® and standard floods. These high quality lamps are reasonably priced, designed to fit your budget, and are available in a variety of pack sizes from 1-packs to contractor packs and pallet programs.

Item Number	Item Description	Unit/Ballast Watts	Incandescent Comparison (Watts)	Initial Lumens	CCT (Kelvin)	CRI	MOL/Height (Inches)	Diameter/Width (Inches)	Input Line Current	Case Quantity	
<b>SPRINGLIGHT™ SPRINGLAMPS®</b>											
801009	★ 9W SpringLamp 27K	9	40	550	2700	82	4.0	1.8	.15A	6	
80100935	★ 9W SpringLamp 35K	9	40	550	3500	82	4.0	1.8	.15A	6	
80100941	★ 9W SpringLamp 41K	9	40	550	4100	82	4.0	1.8	.15A	12	
80100950	★ 9W SpringLamp 50K	9	40	500	5000	82	4.0	1.8	.15A	12	
801014	★ 14W SpringLamp 27K	14	60	900	2700	82	4.4	1.8	.23A	12	
8010143	★ 14W SpringLamp 27K 3PK	14	60	900	2700	82	4.4	1.8	.23A	12	
80101435	★ 14W SpringLamp 35K	14	60	900	3500	82	4.4	1.8	.23A	12	
80101441	★ 14W SpringLamp 41K	14	60	900	4100	82	4.4	1.8	.23A	12	
801014413	★ 14W SpringLamp 41K 3PK	14	60	900	4100	82	4.4	1.8	.23A	12	
80101450	★ 14W SpringLamp 50K	14	60	850	5000	82	4.4	1.8	.23A	12	
801019	★ 19W SpringLamp 27K	19	75	1200	2700	82	4.4	2.3	.31A	12	
8010193	★ 19W SpringLamp 27K 3PK	19	75	1200	2700	82	4.4	2.3	.31A	12	
80101935	★ 19W SpringLamp 35K	19	75	1200	3500	82	4.4	2.3	.31A	12	
80101941	★ 19W SpringLamp 41K	19	75	1200	4100	82	4.4	2.3	.31A	6	
801019413	★ 19W SpringLamp 41K 3PK	19	75	1200	4100	82	4.4	2.3	.31A	6	
80101950	★ 19W SpringLamp 50K	19	75	1200	5000	82	4.4	2.3	.31A	12	
801023	★ 23W SpringLamp 27K	23	100	1600	2700	82	4.8	2.3	.38A	12	
8010233	★ 23W SpringLamp 27K 3PK	23	100	1600	2700	82	4.8	2.3	.38A	12	
80102335	★ 23W SpringLamp 35K	23	100	1600	3500	82	4.8	2.3	.38A	12	
80102341	★ 23W SpringLamp 41K	23	100	1600	4100	82	4.8	2.3	.38A	12	
801023413	★ 23W SpringLamp 41K 3PK	23	100	1600	4100	82	4.8	2.3	.38A	12	
80102350	★ 23W SpringLamp 50K	23	100	1500	5000	82	4.8	2.3	.38A	12	
801027	★ 27W SpringLamp 27K	27	100	1850	2700	82	5.5	2.4	.45A	12	
8010273	★ 27W SpringLamp 27K 3PK	27	100	1850	2700	82	5.5	2.4	.45A	12	
80102735	★ 27W SpringLamp 35K	27	100	1850	3500	82	5.5	2.4	.45A	12	
80102741	★ 27W SpringLamp 41K	27	100	1750	4100	82	5.5	2.4	.45A	12	
801027413	★ 27W SpringLamp 41K 3PK	27	100	1750	4100	82	5.5	2.4	.45A	12	
80102750	★ 27W SpringLamp 50K	27	100	1750	5000	82	5.5	2.4	.45A	12	
<b>SPRINGLIGHT™ REFLECTOR LAMPS</b>											
802014	★ 14w R20 Flood SpringLamp	14	50	495	2700	82	4.3	2.5	.23A	12	
803014	★ 14w R30 Flood SpringLamp	14	65	645	2700	82	5.4	3.7	.23A	12	
8030142	★ 14w R30 Flood SpringLamp 2PK	14	65	645	2700	82	5.4	3.7	.23A	12	
805023	★ 23w Par38 Flood SpringLamp	23	90	1200	2700	82	6.2	4.8	.38A	12	
8050232	★ 23w Par38 Flood SpringLamp 2PK	23	90	1200	2700	82	6.2	4.8	.38A	12	
804023	★ 23w R40 Flood SpringLamp	23	120	1200	2700	82	6.1	4.8	.38A	12	
<b>SPRINGLIGHT™ GLOBES</b>											
8060092	★ 9w G25 Globe SpringLamp 2PK	9	40	495	2700	82	4.3	3.1	.15A	12	
8060142	★ 14w G25 Globe SpringLamp 2PK	14	60	800	2700	82	4.3	3.1	.23A	12	
<b>SPRINGLIGHT™ A-LAMPS</b>											
8070092	★ 9w A-Lamp SpringLamp 2pk	9	40	450	2700	82	4.1	2.2	.15A	12	
8070142	★ 14w A-Lamp SpringLamp 2pk	14	60	800	2700	82	4.3	3.1	.23A	12	



SpringLamp



R20 Flood



R30 Flood



R40 Flood



PAR38 Flood



G25 Globe



ISO 9002  
CERTIFIED