

Features and Benefits


Sleek, low profile cutoff wall pack is ideal for low level area lighting and security. The fixture, specially designed for LED, provides the output of a 60 Watt incandescent using only 14 Watts. Full cut off eliminates any light pollution.

General Specifications

- UL and CUL listed for wet locations
- IP66, dust and water jet proof; Weatherproof and durable silicone rubber gaskets, prevent water and bugs
- Corrosion resistant die-cast all aluminum construction and hardware
- Superior powder coat finish
- High impact polycarbonate lens
- **3 Year Warranty**

MLW Series

MINI WALL PACK

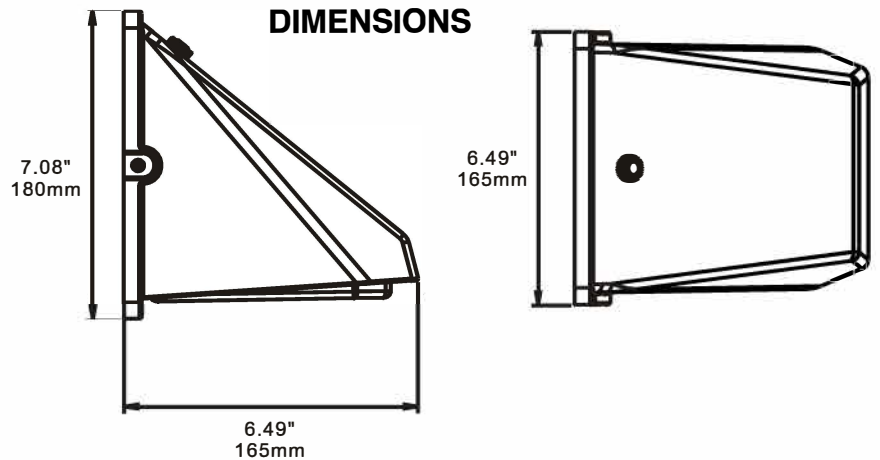

| ELECTRICAL | | | | | | |
|------------|-------------|------|--------------|----------------|----------------|-----|
| Volts | Input Watts | Amps | Power Factor | Ballast Factor | Min Start Temp | UL |
| 120 | 14 | 0.2 | 0.5 | 1.00 | -30°C | Yes |

| PHYSICAL | | | | | | |
|----------|--------|-------|--------|--------|-------|--------|
| Carton | Length | Width | Height | Weight | Mount | Finish |
| 6 | 6.49 | 6.49 | 7.08 | 3.30 | Flush | Bronze |

Powered by **CREE**™
LEDs

Example: **MLW6L14W750L50KBZ**

| SERIES | SIZE | WATTS/LUMENS | COLOR TEMP | FINISH | OPTIONS* |
|-----------------------------|---------------------|--------------------------------------|---------------------------|--------------------|--|
| MLW - Mini Wall Pack | 6L - 6" Wide | 14W750L - 14 Watts/750 Lumens | 50K - 5000 Kelvins | BZ - Bronze | PC120 - 120V Photocell PC277 - 277V Photocell |

*For factory installed photocell, add to end of part number.