



# GREENCREATIVE

Bringing You the Latest in LED Technology


PL:EDGE  
SERIES



**PL & PLS SERIES**

# PLS EDGE PRODUCT FEATURES

## PLS Base Types

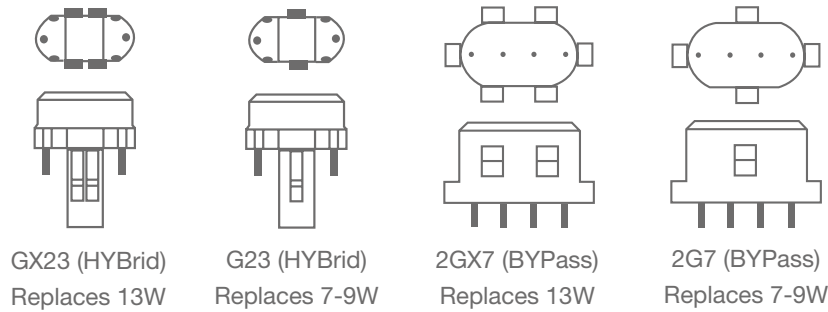

The PLS EDGE Series lamps feature a variety of base types suitable for a wide range of applications. The PLS HYBrid lamps can operate on either existing magnetic ballasts or on 120-277V line voltage. The PLS BYPass lamps require bypassing the ballast during installation and run directly off line voltage.

## Extra Wide Beam Design - 180° Rotatable Base



PLS lamp bases rotate 180° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

## PLS V GX23 - Designed for Vertical Applications



GREEN CREATIVE PLS V LED Lamp



Other PLS V LED Lamp

Compared to other PLS vertical lamps, the GREEN CREATIVE PLS V's patented round diffuser improves the overall light output and aesthetics of the fixture.

# PLS EDGE SERIES

## PLS HYB GX23



5.5W  
Replaces Single  
Twin Tube



6W  
Replaces Double  
Twin Tube



7W  
For Vertical  
Installation



GX23 (HYBrid)  
Replaces 13W

- HYBrid installation - DIRect or BYPass
- Compatible with magnetic ballast or 120-277V line voltage
- Compatible with GX23 installations
- 2700K / 3000K / 3500K / 4000K CCT

REPLACES



**13W  
CFL**

60% Energy Savings

## PLS 3.5W HYB G23



G23 (HYBrid)  
Replaces 7-9W

- HYBrid installation - DIRect or BYPass
- Compatible with magnetic ballast or 120-277V line voltage
- Compatible with G23 installations
- 3500K CCT


3.5W REPLACES



**7-9W  
CFL**

60% Energy Savings

## PLS 5.5W BYP 2GX7



2GX7 (BYPass)  
Replaces 13W

- BYPass installation - requires bypassing the ballast
- 120-277V Universal voltage
- Compatible with 2GX7 installations
- 3500K CCT


5.5W REPLACES



**13W  
CFL**

60% Energy Savings

## PLS 3.5W BYP 2G7



2G7 (BYPass)  
Replaces 7-9W


- BYPass installation - requires bypassing the ballast
- 120-277V Universal voltage
- Compatible with 2G7 installations
- 3500K CCT

3.5W REPLACES









**7-9W  
CFL**

60% Energy Savings



## SPECIFICATIONS

	Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.
 <b>PLS 5.5W HYB GX23</b>	5.5PLS/827/HYB/GX23	57820	2700K	450	13W	82	120°	80	No	50,000	120-277V	Yes
	5.5PLS/830/HYB/GX23	57821	3000K	500	13W	91	120°	80	No	50,000	120-277V	Yes
	5.5PLS/835/HYB/GX23	57822	3500K	500	13W	91	120°	80	No	50,000	120-277V	Yes
	5.5PLS/840/HYB/GX23	57823	4000K	520	13W	95	120°	80	No	50,000	120-277V	Yes
 <b>PLS 6W HYB GX23</b>	6PLS/827/HYB/GX23	57962	2700K	520	13W	87	110°	80	No	50,000	120-277V	No
	6PLS/830/HYB/GX23	57963	3000K	550	13W	92	110°	80	No	50,000	120-277V	No
	6PLS/835/HYB/GX23	57964	3500K	550	13W	92	110°	80	No	50,000	120-277V	No
	6PLS/840/HYB/GX23	57965	4000K	560	13W	93	110°	80	No	50,000	120-277V	No
 <b>PLS V 7W HYB GX23</b>	7PLSV/827/HYB/GX23	57931	2700K	550	13W	79	110°	80	No	50,000	120-277V	No
	7PLSV/830/HYB/GX23	57932	3000K	550	13W	79	110°	80	No	50,000	120-277V	No
	7PLSV/835/HYB/GX23	57933	3500K	560	13W	80	110°	80	No	50,000	120-277V	No
	7PLSV/840/HYB/GX23	57934	4000K	570	13W	81	110°	80	No	50,000	120-277V	No
 <b>PLS 3.5W HYB G23</b>	3.5PLS/835/HYB/G23	57814	3500K	300	7-9W	86	120°	80	No	50,000	120-277V	Yes
 <b>PLS 5.5W BYP 2GX7</b>	5.5PLS/835/BYP/2GX7	57826	3500K	500	13W	91	120°	80	No	50,000	120-277V	Yes
 <b>PLS 3.5W BYP 2G7</b>	3.5PLS/835/BYP/2G7	57818	3500K	300	7-9W	86	120°	80	No	50,000	120-277V	Yes

\* Suitable for damp locations