

PLS 3.5W HYB G23 TITANIUM LED SERIES



3.5W REPLACES





7-9W
CFL

60% Energy Savings

PRO



- ⌚ HYBRid installation - DIRect or BYPass
- ⌚ Compatible with magnetic ballasts - DIRect installation
- ⌚ Built-in universal voltage driver - BYPass installation
- ⌚ 180° rotatable base
- ⌚ Exceptional efficacy 86 LPW
- ⌚ Suitable for use in totally enclosed fixtures



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS




PLS 3.5W HYB G23 TITANIUM LED SERIES

APPLICATIONS


Office




Hospitality

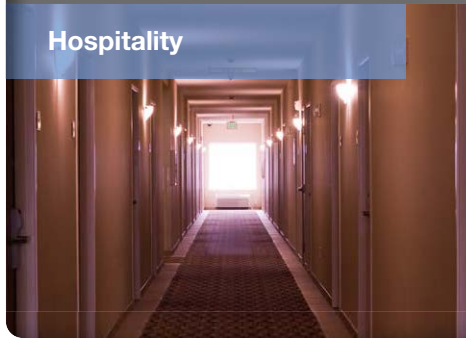

General

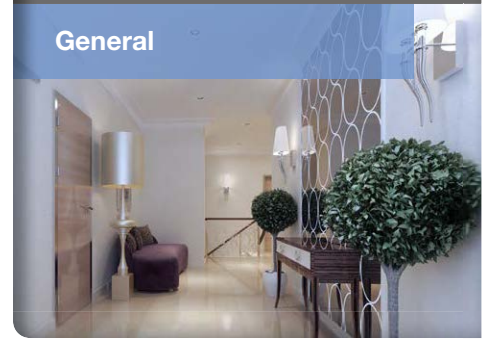

Base: G23 (2-pin CFL)
Voltage: Magnetic ballast compatible
 120-277V
Dimmable: No
PF: 0.9
Lifetime: 50,000 hrs
Weight: 0.08lb / 38g

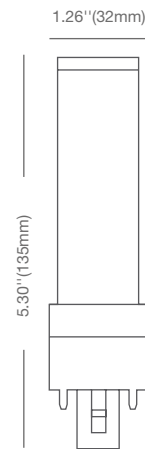

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
3.5PLS/827/HYB/G23	57812	3.5	Warm White 2700K	80	280	80	120°
3.5PLS/835/HYB/G23	57814	3.5	Halogen White 3500K	80	300	86	120°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Full installation guide and more details available on website