



GREENCREATIVE

Bringing You the Latest in LED Technology


PL:EDGE
SERIES



PL & PLS SERIES

PLS EDGE PRODUCT FEATURES

PLS Base Types

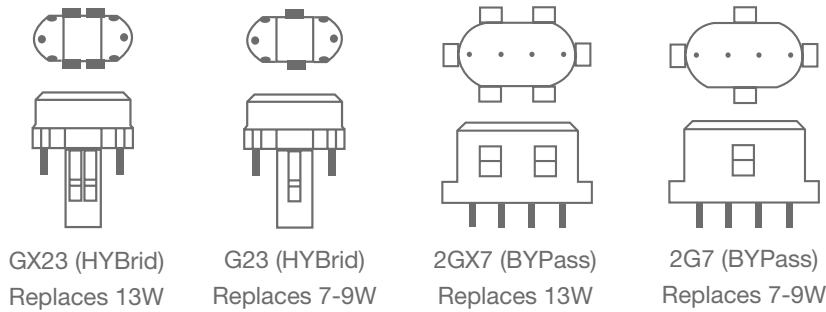

The PLS EDGE Series lamps feature a variety of base types suitable for a wide range of applications. The PLS HYBrid lamps can operate on either existing magnetic ballasts or on 120-277V line voltage. The PLS BYPass lamps require bypassing the ballast during installation and run directly off line voltage.

Extra Wide Beam Design - 180° Rotatable Base



PLS lamp bases rotate 180° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

PLS V GX23 - Designed for Vertical Applications



GREEN CREATIVE PLS V LED Lamp



Other PLS V LED Lamp

Compared to other PLS vertical lamps, the GREEN CREATIVE PLS V's patented round diffuser improves the overall light output and aesthetics of the fixture.

PLS EDGE SERIES

PLS HYB GX23



5.5W
Replaces Single
Twin Tube



6W
Replaces Double
Twin Tube



7W
For Vertical
Installation



GX23 (HYBrid)
Replaces 13W

- HYBrid installation - DIRect or BYPass
- Compatible with magnetic ballast or 120-277V line voltage
- Compatible with GX23 installations
- 2700K / 3000K / 3500K / 4000K CCT

REPLACES



**13W
CFL**

60% Energy Savings

PLS 3.5W HYB G23



G23 (HYBrid)
Replaces 7-9W

- HYBrid installation - DIRect or BYPass
- Compatible with magnetic ballast or 120-277V line voltage
- Compatible with G23 installations
- 3500K CCT


3.5W REPLACES



**7-9W
CFL**

60% Energy Savings

PLS 5.5W BYP 2GX7



2GX7 (BYPass)
Replaces 13W

- BYPass installation - requires bypassing the ballast
- 120-277V Universal voltage
- Compatible with 2GX7 installations
- 3500K CCT


5.5W REPLACES



**13W
CFL**

60% Energy Savings

PLS 3.5W BYP 2G7



2G7 (BYPass)
Replaces 7-9W


- BYPass installation - requires bypassing the ballast
- 120-277V Universal voltage
- Compatible with 2G7 installations
- 3500K CCT

3.5W REPLACES









**7-9W
CFL**

60% Energy Savings



SPECIFICATIONS

	Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.
 PLS 5.5W HYB GX23	5.5PLS/827/HYB/GX23	57820	2700K	450	13W	82	120°	80	No	50,000	120-277V	Yes
	5.5PLS/830/HYB/GX23	57821	3000K	500	13W	91	120°	80	No	50,000	120-277V	Yes
	5.5PLS/835/HYB/GX23	57822	3500K	500	13W	91	120°	80	No	50,000	120-277V	Yes
	5.5PLS/840/HYB/GX23	57823	4000K	520	13W	95	120°	80	No	50,000	120-277V	Yes
 PLS 6W HYB GX23	6PLS/827/HYB/GX23	57962	2700K	520	13W	87	110°	80	No	50,000	120-277V	No
	6PLS/830/HYB/GX23	57963	3000K	550	13W	92	110°	80	No	50,000	120-277V	No
	6PLS/835/HYB/GX23	57964	3500K	550	13W	92	110°	80	No	50,000	120-277V	No
	6PLS/840/HYB/GX23	57965	4000K	560	13W	93	110°	80	No	50,000	120-277V	No
 PLS V 7W HYB GX23	7PLSV/827/HYB/GX23	57931	2700K	550	13W	79	110°	80	No	50,000	120-277V	No
	7PLSV/830/HYB/GX23	57932	3000K	550	13W	79	110°	80	No	50,000	120-277V	No
	7PLSV/835/HYB/GX23	57933	3500K	560	13W	80	110°	80	No	50,000	120-277V	No
	7PLSV/840/HYB/GX23	57934	4000K	570	13W	81	110°	80	No	50,000	120-277V	No
 PLS 3.5W HYB G23	3.5PLS/835/HYB/G23	57814	3500K	300	7-9W	86	120°	80	No	50,000	120-277V	Yes
 PLS 5.5W BYP 2GX7	5.5PLS/835/BYP/2GX7	57826	3500K	500	13W	91	120°	80	No	50,000	120-277V	Yes
 PLS 3.5W BYP 2G7	3.5PLS/835/BYP/2G7	57818	3500K	300	7-9W	86	120°	80	No	50,000	120-277V	Yes

* Suitable for damp loactions