


PL EDGE SERIES PRODUCT FEATURES

PL DIR & PL BYP Installation

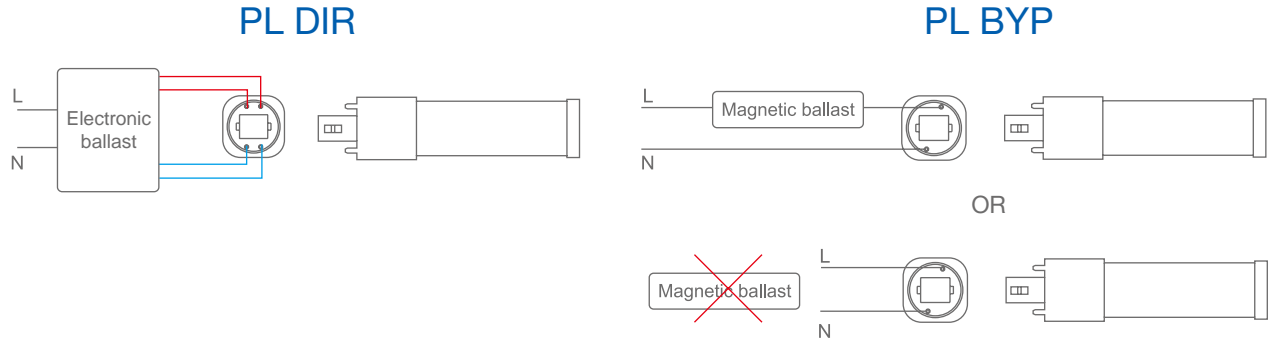

The PL EDGE DIRect Series plug & play lamps are compatible with G24q & GX24q (4-pin) installations and run directly off the existing electronic ballast. The PL EDGE BYPass Series lamps are hybrid lamps capable of operating with the existing magnetic ballast or line voltage after the ballast has been bypassed. The PL BYP lamps are compatible with G24d / GX24d (2-pin magnetic ballast or bypass) & G24q / GX24q (4-pin bypass) installations.

PL H Adjustable Base



All PL H lamp bases rotate 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

PL V Patented Round Design



GREEN CREATIVE PL V LED Lamp



Other PL V LED Lamp

Compared to other square-shaped PL vertical lamps, the GREEN CREATIVE PL V's patented round diffuser improves the overall light output and aesthetics of the fixture.


PL EDGE DIR SERIES

PL H DIR




9.5W

10.5W HIGH CRI



G24q & GX24q
(4-Pin CFL)



Horizontal Installation

- 120-277V Universal voltage
- Compatible with G24q & GX24q installations
- Suitable for replacing 13W, 18W, 26W, 32W & 42W CFL PL lamps
- 2700K / 3000K / 3500K / 4000K CCT
- HIGH CRI version available in 3000K CCT


REPLACES




**26W
CFL**

60% Energy Savings

PL H 5.5W DIR



G24q & GX24q
(4-Pin CFL)



Horizontal Installation

- 120-277V Universal voltage
- Compatible with G24q & GX24q installations
- Suitable for replacing 13W & 18W CFL PL lamps
- 2700K / 3000K / 3500K / 4000K CCT

5.5W REPLACES



**13-18W
CFL**


60% Energy Savings

PL V DIR




10W

11W HIGH CRI



G24q & GX24q
(4-Pin CFL)



Vertical Installation

- 120-277V Universal voltage
- Compatible with G24q & GX24q installations
- Suitable for replacing 13W, 18W, 26W, 32W & 42W CFL PL lamps
- 2700K / 3000K / 3500K / 4000K CCT
- HIGH CRI version available in 3000K CCT


REPLACES



**26W
CFL**

60% Energy Savings

PL V 6.5W DIR



G24q & GX24q
(4-Pin CFL)



Vertical Installation

- 120-277V Universal voltage
- Compatible with G24q & GX24q installations
- Suitable for replacing 13W & 18W CFL PL lamps
- 2700K / 3000K / 3500K / 4000K CCT

6.5W REPLACES



**13-18W
CFL**


60% Energy Savings

PL EDGE BYP SERIES

PL H 10.5W BYP



G24d & GX24d
(2-Pin CFL)



Horizontal Installation

10.5W REPLACES



**26W
CFL**


60% Energy Savings

- HYBRid installation - DIRect or BYPass
- Compatible with magnetic ballasts or 120-277V line voltage
- Compatible with G24d / GX24d & G24q / GX24q installations
- 2700K / 3000K / 3500K / 4000K CCT

PL H 6W BYP



G24d & GX24d
(2-Pin CFL)



Horizontal Installation

6W REPLACES



**13-18W
CFL**

60% Energy Savings

- HYBRid installation - DIRect or BYPass
- Compatible with magnetic ballasts or 120-277V line voltage
- Compatible with G24d / GX24d & G24q / GX24q installations
- 3500K / 4000K CCT
- E26 & GU24 versions available in 3000K / 3500K / 4000K CCT

PL V 11.5W BYP



G24d & GX24d
(2-Pin CFL)



Vertical Installation

11.5W REPLACES



**26W
CFL**

60% Energy Savings

- HYBRid installation - DIRect or BYPass
- Compatible with magnetic ballasts or 120-277V line voltage
- Compatible with G24d / GX24d & G24q / GX24q installations
- 2700K / 3000K / 3500K / 4000K CCT

PL V 7W BYP



G24d & GX24d
(2-Pin CFL)



Vertical Installation

7W REPLACES



**13-18W
CFL**

60% Energy Savings

- HYBRid installation - DIRect or BYPass
- Compatible with magnetic ballasts or 120-277V line voltage
- Compatible with G24d / GX24d & G24q / GX24q installations
- 3500K / 4000K CCT















LM 79

LM 80

TM 21



SPECIFICATIONS

| | Model | Product | CCT | Lumens (lm) | Equiv. | LPW | Beam Angle | CRI (typ.) | Dim | Life (hrs) | Voltage | Encl. |
|--|-------------------|---------|-------|-------------|--------|-----|------------|------------|-----|------------|----------|-------|
|  PL H 9.5W DIR | 9.5PLH/827/DIR | 57899 | 2700K | 870 | 26W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 9.5PLH/830/DIR | 57900 | 3000K | 920 | 26W | 97 | 110° | 80 | | 50,000 | 120-277V | No |
| | 9.5PLH/835/DIR | 57901 | 3500K | 920 | 26W | 97 | 110° | 80 | | 50,000 | 120-277V | No |
| | 9.5PLH/840/DIR | 57902 | 4000K | 935 | 26W | 98 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL H 10.5W DIR | 10.5PLH/930/DIR | 57903 | 3000K | 890 | 26W | 85 | 110° | 90 | | 50,000 | 120-277V | No |
|  PL H 5.5W DIR | 5.5PLH/827/DIR | 57895 | 2700K | 520 | 13-18W | 95 | 110° | 80 | | 50,000 | 120-277V | No |
| | 5.5PLH/830/DIR | 57896 | 3000K | 550 | 13-18W | 100 | 110° | 80 | | 50,000 | 120-277V | No |
| | 5.5PLH/835/DIR | 57897 | 3500K | 550 | 13-18W | 100 | 110° | 80 | | 50,000 | 120-277V | No |
| | 5.5PLH/840/DIR | 57898 | 4000K | 560 | 13-18W | 102 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL V 10W DIR | 10PLV/827/DIR | 57914 | 2700K | 950 | 26W | 95 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10PLV/830/DIR | 57915 | 3000K | 1000 | 26W | 100 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10PLV/835/DIR | 57916 | 3500K | 1000 | 26W | 100 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10PLV/840/DIR | 57917 | 4000K | 1020 | 26W | 102 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL V 11W DIR | 11PLV/930/DIR | 57918 | 3000K | 920 | 26W | 84 | 110° | 90 | | 50,000 | 120-277V | No |
|  PL V 6.5W DIR | 6.5PLV/827/DIR | 57910 | 2700K | 570 | 13-18W | 88 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6.5PLV/830/DIR | 57911 | 3000K | 600 | 13-18W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6.5PLV/835/DIR | 57912 | 3500K | 600 | 13-18W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6.5PLV/840/DIR | 57913 | 4000K | 620 | 13-18W | 95 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL H 10.5W BYP | 10.5PLH/827/BYP | 57906 | 2700K | 870 | 26W | 83 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10.5PLH/830/BYP | 57907 | 3000K | 920 | 26W | 88 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10.5PLH/835/BYP | 57908 | 3500K | 920 | 26W | 88 | 110° | 80 | | 50,000 | 120-277V | No |
| | 10.5PLH/840/BYP | 57909 | 4000K | 935 | 26W | 89 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL H 6W BYP | 6PLH/835/BYP | 57904 | 3500K | 550 | 13-18W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6PLH/840/BYP | 57905 | 4000K | 560 | 13-18W | 93 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL H 6W BYP E26 | 6PLH/830/BYP/E26 | 57925 | 3000K | 550 | 13W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6PLH/835/BYP/E26 | 57926 | 3500K | 550 | 13W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6PLH/840/BYP/E26 | 57927 | 4000K | 560 | 13W | 93 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL H 6W BYP GU24 | 6PLH/830/BYP/GU24 | 57928 | 3000K | 550 | 13W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6PLH/835/BYP/GU24 | 57929 | 3500K | 550 | 13W | 92 | 110° | 80 | | 50,000 | 120-277V | No |
| | 6PLH/840/BYP/GU24 | 57930 | 4000K | 560 | 13W | 93 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL V 11.5W BYP | 11.5PLV/827/BYP | 57921 | 2700K | 950 | 26W | 83 | 110° | 80 | | 50,000 | 120-277V | No |
| | 11.5PLV/830/BYP | 57922 | 3000K | 1000 | 26W | 87 | 110° | 80 | | 50,000 | 120-277V | No |
| | 11.5PLV/835/BYP | 57923 | 3500K | 1000 | 26W | 87 | 110° | 80 | | 50,000 | 120-277V | No |
| | 11.5PLV/840/BYP | 57924 | 4000K | 1020 | 26W | 89 | 110° | 80 | | 50,000 | 120-277V | No |
|  PL V 7W BYP | 7PLV/835/BYP | 57919 | 3500K | 600 | 13-18W | 86 | 110° | 80 | | 50,000 | 120-277V | No |
| | 7PLV/840/BYP | 57920 | 4000K | 620 | 13-18W | 89 | 110° | 80 | | 50,000 | 120-277V | No |

* Suitable for damp locations