

# PL V 10W DIR TITANIUM LED SERIES



PL:EDGE  
SERIES

10W REPLACES




**26W  
CFL**

60% Energy Savings

PRO



- Easy to install - Plug & Play Direct
- Ballast smart control technology
- Exceptional efficacy 102 LPW
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K & 4000K CCT



## PL PRODUCT FEATURES

### High Performance - Ballast Smart Control

The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

| Ballast Type | Lumens | Bare Lamp |
|--------------|--------|-----------|
| 13W          | 590    | 5.4W      |
| 18W          | 820    | 6.5W      |
| 26W          | 1020   | 10W       |

### Innovative Round Design - Patent Pending



GREEN CREATIVE PL V LED Lamp



Other PL V LED Lamp


The PL V lamp features a patent pending fully round design. Compared to other square shaped PL vertical lamps, the GREEN CREATIVE PL V improves the overall light output and aesthetics of the fixture.

# PL V 10W DIR TITANIUM LED SERIES



## APPLICATIONS

### Retail

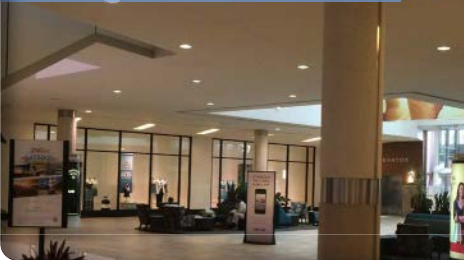


### Hospitality



### Office



**Base:** G24q & GX24q (4-pin CFL)  
**Voltage:** Ballast compatible 120-277V  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.20lb / 91g

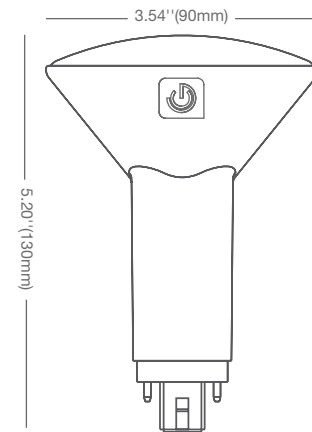

## SPECIFICATIONS\*

| Model                | Product | Power (W) | CCT                 | CRI (typ.) | Lumens | LPW | Beam Angle |
|----------------------|---------|-----------|---------------------|------------|--------|-----|------------|
| <b>10PLV/827/DIR</b> | 57914   | 10        | Soft White 2700K    | 80         | 950    | 95  | 120°       |
| <b>10PLV/830/DIR</b> | 57915   | 10        | Warm White 3000K    | 80         | 1000   | 100 | 120°       |
| <b>10PLV/835/DIR</b> | 57916   | 10        | Neutral White 3500K | 80         | 1000   | 100 | 120°       |
| <b>10PLV/840/DIR</b> | 57917   | 10        | Cool White 4000K    | 80         | 1020   | 102 | 120°       |

## BALLAST PERFORMANCE

| Ballast Type | Bare Lamp (W) | System (W)  | 2700K Lumens | 3000K Lumens | 3500K Lumens | 4000K Lumens |
|--------------|---------------|-------------|--------------|--------------|--------------|--------------|
| <b>13W</b>   | <b>5.4</b>    | <b>7.2</b>  | <b>550</b>   | <b>540</b>   | <b>540</b>   | <b>590</b>   |
| <b>18W</b>   | <b>6.5</b>    | <b>8.7</b>  | <b>720</b>   | <b>760</b>   | <b>760</b>   | <b>820</b>   |
| <b>26W</b>   | <b>10</b>     | <b>12.5</b> | <b>950</b>   | <b>1000</b>  | <b>1000</b>  | <b>1020</b>  |
| <b>42W</b>   | <b>10.4</b>   | <b>13</b>   | <b>1050</b>  | <b>1100</b>  | <b>1100</b>  | <b>1150</b>  |

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

\* Specification data is preliminary and may be subject to change

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Not intended for use in enclosed fixtures

\*\*\*\* Full installation guide and more details available on website

Ref.#: DS161-PLV-10W-DIR