

PL H 9.5W BYP TITANIUM LED SERIES



9.5W REPLACES



**26W
CFL**

60% Energy Savings

PRO




- ⌚ **HYBrid installation - DIrect or BYPass**
- ⌚ **Compatible with magnetic ballasts - DIrect installation**
- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with G24d, GX24d, G24q & GX24q bases**
- ⌚ **Exceptional efficacy 100 LPW**
- ⌚ **Lasts 4 times longer than CFL**




PL PRODUCT FEATURES

BYPass Installation - Electronic Ballasts

This PL H lamp is not compatible with electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

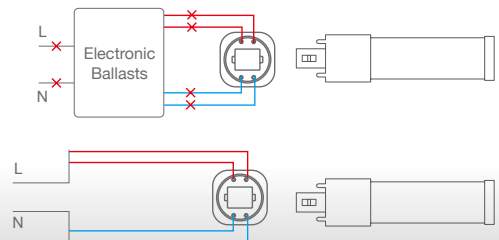

HYBrid Installation - DIrect or BYPass - Magnetic Ballasts

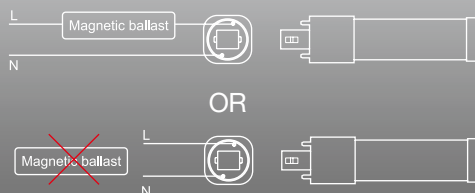

When used with a magnetic ballast, the PL H can function as a plug & play lamp and operate with the existing ballast. If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

PL H 9.5W BYP TITANIUM LED SERIES



APPLICATIONS

Retail




Hospitality



Office



- Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)
- Voltage:** Magnetic ballast compatible
120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime (L70):** 50,000 hrs
- Weight:** 0.18lb / 82g

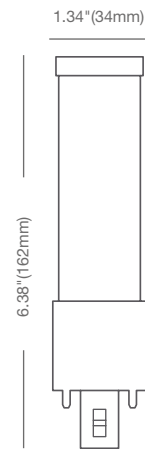

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
9.5PLH/827/BYP	28354	9.5	Soft White 2700K	82	870	92	110°
9.5PLH/830/BYP	28355	9.5	Warm White 3000K	82	920	97	110°
9.5PLH/835/BYP	28356	9.5	Neutral White 3500K	82	920	97	110°
9.5PLH/840/BYP	28357	9.5	Cool White 4000K	82	950	100	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website