



Horizontal Installation



Vertical Installation



BYPass Installation - 2-Pin & 4-Pin

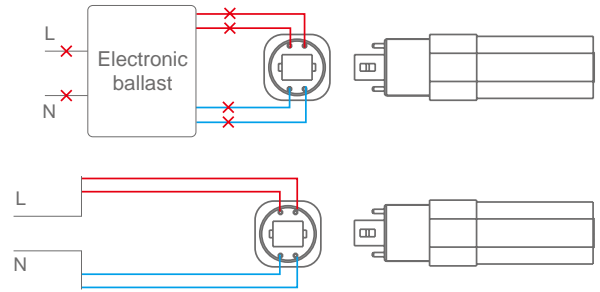

SPECIFICATIONS

	Model	Product	CCT	Lumens (lm)	Equiv.	LPW	Beam Angle	CBCP (cd)	CRI (typ.)	Dim	Life (hrs)	Voltage	Encl.	
 PL H 9.5W BYP	9.5PLH/827/BYP	28354	2700K	870	26W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	9.5PLH/830/BYP	28355	3000K	920	26W	97	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	9.5PLH/835/BYP	28356	3500K	920	26W	97	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	9.5PLH/840/BYP	28357	4000K	950	26W	100	110°	N.A.	82	No	50,000	120-277V	No	N.A.
 PL H 6W BYP	6PLH/835/BYP/R	57904	3500K	550	13-18W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	6PLH/840/BYP/R	57905	4000K	560	13-18W	93	110°	N.A.	82	No	50,000	120-277V	No	N.A.
 PL H 6W BYP E26	6PLH/830/BYP/E26	57925	3000K	550	13W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	6PLH/835/BYP/E26	57926	3500K	550	13W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	6PLH/840/BYP/E26	57927	4000K	560	13W	93	110°	N.A.	82	No	50,000	120-277V	No	N.A.
 PL H 6W BYP GU24	6PLH/830/BYP/GU24/R	57928	3000K	550	13W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	6PLH/835/BYP/GU24/R	57929	3500K	550	13W	92	110°	N.A.	82	No	50,000	120-277V	No	N.A.
	6PLH/840/BYP/GU24/R	57930	4000K	560	13W	93	110°	N.A.	82	No	50,000	120-277V	No	N.A.
 PL V 10W BYP	10PLV/827/BYP	28362	2700K	950	26W	95	120°	N.A.	82	No	50,000	120-277V	No	N.A.
	10PLV/830/BYP	28363	3000K	1000	26W	100	120°	N.A.	82	No	50,000	120-277V	No	N.A.
	10PLV/835/BYP	28364	3500K	1000	26W	100	120°	N.A.	82	No	50,000	120-277V	No	N.A.
	10PLV/840/BYP	28365	4000K	1020	26W	102	120°	N.A.	82	No	50,000	120-277V	No	N.A.
 PL V 6.5W BYP	6.5PLV/835/BYP	28360	3500K	600	13-18W	92	120°	N.A.	82	No	50,000	120-277V	No	N.A.
	6.5PLV/840/BYP	28361	4000K	620	13-18W	95	120°	N.A.	82	No	50,000	120-277V	No	N.A.