

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages

### CONSTRUCTION

The shoplight's 5-1/2" white reflector provides a wide spread illumination. Fully assembled, ready-to-install. Comes with 5' power cord - no wiring required. Supplied with (2) "S" hooks and (2) 9-1/2" chains for no-hassle installation.

Minimum Starting Temperature:

1233 CW - 0 degrees

1233 RE - 0 degrees

1233 - 50 degrees

### OPTICS

Utilizes (2) 40W, 34W or 25W linear T12 fluorescent lamps for energy efficiency. (not included)

### ELECTRICAL

Standard with low-power factor magnetic ballast (120 volt, 60Hz).

### LISTINGS

CUL listed to US and Canadian safety standards and suitable for damp locations.

### WARRANTY

2-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Indoor General Purpose


# Shop Light Utility

Linear T12 Fluorescent



### Dimensions

All dimensions are inches (centimeters)

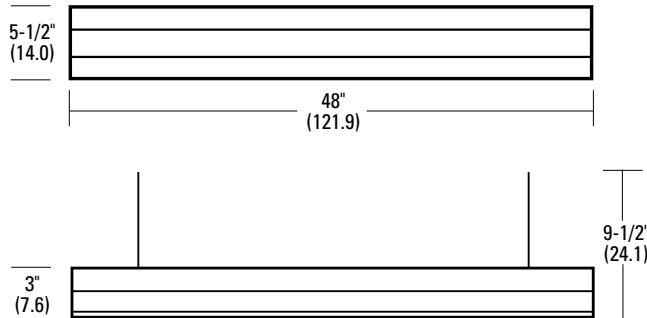

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example: 1233**

<b>1233</b>	
<b>Series</b> <sup>1,2,3,4</sup>	<b>Ballast/voltage</b>
<b>1233 Shoplight</b> (2) 40W, 34W or 25W linear T12 fluorescent lamps required	(blank) 120-volt electronic ballast (standard) 1233 RE Residential Electronic Ballast 1233 CW 232 Electronic Cold Weather Ballast Other voltage and ballast types (consult factory)

### Notes

- Lamps not included.
- Use with non-dimmable switches only.
- Not designed to be mounted flush to the ceiling.
- Must be plugged into three pronged outlets to avoid electrical shock and to ensure reliable starting.