



LED Dimmable Recessed Retrofits

TCP's Dimmable Retrofit Kits are the perfect choice for new construction and retrofit opportunities when a sleek, integrated look is preferred.

Limitless options for the following applications:

- Dimmable 6", 5" & 4" downlight applications

Great features and benefits:

- 120W, 85W & 75W BR40/BR30/R20 downlight replacement options
- Smooth, uniform dimming from 100% - 0.5%
- Highly efficient LEDs and Driver
- Long Life: 35,000 hours
- Easy installation — pigtail and spring clips



4" Dimmable Recessed Retrofit

5/6" Dimmable Recessed Retrofit



LED
we know light.™





LED Dimmable Recessed Retrofits Specifications

LED	35,000 hours average rated life, 120 volts
------------	--------------------------------------------

Applications:

Ideal for dimmable 6", 5" & 4" downlight applications



Perfect for retrofit or new construction recessed downlight applications

Features and Benefits

- 5/6" unit ideal for replacing dimmable 85W and 120W incandescent alternatives in 5" and 6" recessed cans
- 4" unit ideal for replacing 75W incandescent alternatives in a 4" recessed can
- Smooth, uniform dimming
- Highly efficient LEDs and Driver
- Long Life: 35,000 hours
- UL approved for damp locations
- Easy installation and integrated trim
- Shatter Resistant




LDRACCGU24 - GU24 Adapter



- LED11DR5627K
- LED11DR5630K
- LED11DR5641K
- LED11DR5650K
- LED14DR5627K
- LED14DR5630K
- LED14DR5641K
- LED14DR5650K




- LED10DR427K
- LED10DR430K
- LED10DR435K
- LED10DR441K
- LED10DR450K

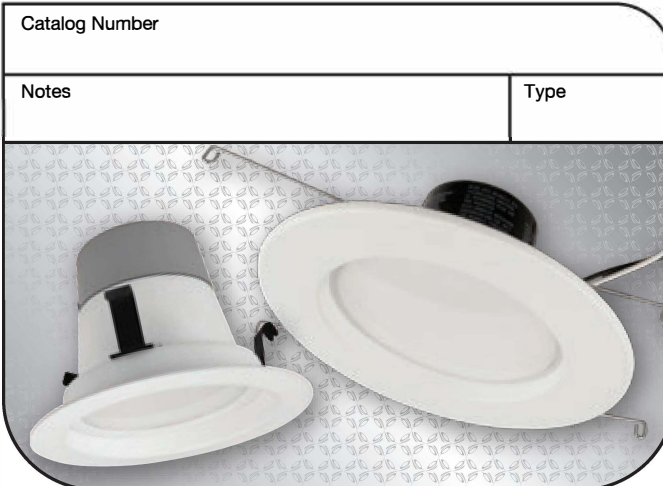

Specifications

	14W	11W	10W
Recessed Downlight Size:	5", 6"	5", 6"	4"
Input Line Voltage:	120 VAC	120 VAC	120 VAC
Input Power	14 W	11 W	10 W
Input Line Frequency	50/60HZ	50/60HZ	50/60HZ
Lamp Life (Rated)	35,000 hrs	35,000 hrs	35,000 hrs
Minimum Starting Temp	-20°C	-20°C	-20°C
Maximum Operating Temp	40°C	40°C	40°C

IC-rated for direct contact with insulation

Warranties and Certifications:	Item #	Description	Life Hours	Replacement	Voltage	Wattage	Lumens	LPW	CCT	CRI	Case Qty	
 5 YEAR WARRANTY * <small>*Based on 12 hours usage per day</small>	Downlight Retrofits compatible with 5/6" recessed cans											
	LED14DR5627K	LED 14W 5/6" Recessed Downlight - 2700K	35,000	120	120	14	1250	89.3	2700K	80	6	
	LED14DR5630K	LED 14W 5/6" Recessed Downlight - 3000K	35,000	120	120	14	1300	92.9	3000K	80	6	
	LED14DR5641K	LED 14W 5/6" Recessed Downlight - 4100K	35,000	120	120	14	1300	92.9	4100K	80	6	
	LED14DR5650K	LED 14W 5/6" Recessed Downlight - 5000K	35,000	120	120	14	1350	96.4	5000K	80	6	
	LED11DR5627K	LED 11W 5/6" Recessed Downlight - 2700K	35,000	85	120	11	800	72.7	2700K	80	6	
	LED11DR5630K	LED 11W 5/6" Recessed Downlight - 3000K	35,000	85	120	11	850	77.3	3000K	80	6	
	LED11DR5641K	LED 11W 5/6" Recessed Downlight - 4100K	35,000	85	120	11	900	81.8	4100K	80	6	
	LED11DR5650K	LED 11W 5/6" Recessed Downlight - 5000K	35,000	85	120	11	950	86.4	5000K	80	6	
	Downlight Retrofits compatible with 4" recessed cans											
	LED10DR427K	LED 10W 4" Recessed Downlight - 2700K	35,000	75	120	10	750	75.0	2700K	80	6	
	LED10DR430K	LED 10W 4" Recessed Downlight - 3000K	35,000	75	120	10	750	75.0	3000K	80	6	
	LED10DR435K	LED 10W 4" Recessed Downlight - 3500K	35,000	75	120	10	775	77.5	3500K	80	6	
	LED10DR441K	LED 10W 4" Recessed Downlight - 4100K	35,000	75	120	10	800	80.0	4100K	80	6	
	LED10DR450K	LED 10W 4" Recessed Downlight - 5000K	35,000	75	120	10	800	80.0	5000K	80	6	
	Accessory											
LDRACCGU24	GU24 Adapter											

