

### Product family features

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Maestro®, Maestro IR®, Maestro Wireless®, Caséta® Wireless, Pico® wireless, Diva®, Skylark Contour® and Skylark® controls, and Claro® and Satin Colors® accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)

### Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables

**Available finishes**

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**IV**  
Ivory



**GR**  
Gray



**BR**  
Brown



**BL**  
Black

Satin Colors® finishes



**SW**  
Snow



**LS**  
Limestone



**BI**  
Biscuit



**ES**  
Eggshell



**PD**  
Palladium



**TP**  
Taupe



**ST**  
Stone



**BG**  
Bluestone



**PL**  
Plum



**SG**  
Sea Glass



**TQ**  
Turquoise



**GS**  
Goldstone



**DS**  
Desert Stone



**GB**  
Greenbriar

Metal finishes\*



**MS**  
Mocha Stone



**TC**  
Terracotta



**SI**  
Sienna



**HT**  
Hot



**MR**  
Merlot



**MN**  
Midnight



**SS**  
Stainless Steel

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Caséta® Wireless, Pico® wireless, Diva®, Skylark Contour® and Skylark® controls, and Claro® and Satin Colors® accessories**



1-gang\*

CW-1-**XX**<sup>1</sup>  
SC-1-**XX**<sup>2</sup>


W: 2.94 in (75 mm); H: 4.69 in (119 mm)  
P: .30 in (7.6 mm)



4-gang\*

CW-4-**XX**<sup>1</sup>  
SC-4-**XX**<sup>2</sup>

W: 8.37 in (213 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



2-gang\*

CW-2-**XX**<sup>1</sup>  
SC-2-**XX**<sup>2</sup>

W: 4.75 in (121 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



5-gang\*

CW-5-**XX**<sup>1</sup>  
SC-5-**XX**<sup>2</sup>

W: 10.18 in (259 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)



3-gang\*

CW-3-**XX**<sup>1</sup>  
SC-3-**XX**<sup>2</sup>

W: 6.56 in (167 mm); H: 4.69 in (119 mm);  
P: .30 in (7.6 mm)

**XX**<sup>1</sup>: Gloss and metal color codes  
**XX**<sup>2</sup>: Satin Colors® codes


Multi-gang dimmer installations may require derating.

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

## Mounting requirements and how to understand ganging and derating

### Individual devices

Individual dimmers, switches, wall sensors, and accessories typically mount in standard 1-gang electrical boxes (**fig. A**).




1-gang box  
(W: 2 in x H: 3 in x D: 2.5 in)

### Standard ganging


Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate. (**fig. B-D**)

Standard multi-gang installation:


- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal); see derating tables



2-gang box  
(W: 4 in x H: 3 in x D: 2.5 in)




3-gang box  
(W: 6 in x H: 3 in x D: 2.5 in)




4-gang box  
(W: 8 in x H: 3 in x D: 2.5 in)

**Designer | Claro® and Satin Colors® Wallplates & Accessories**


Wallplates




1-gang  
CW-1-  
SC-1-




5-gang  
CW-5-  
SC-5-




2-gang  
CW-2-  
SC-2-

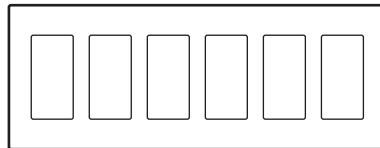

6-gang  
CW-6-  
SC-6-



3-gang  
CW-3-  
SC-3-



4-gang  
CW-4-  
SC-4-