

Mechanical switches



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all light sources and motor loads
- Available with locator light

Fan controls



- Paddle turns on/off
- Slide up to increase speed, down to decrease speed
- 3 quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Does not include locator light
- Designed to prevent motor hum

General purpose switches

Mechanical switches

Single-pole 120/277V 15A	CA-1PS- XX ¹ SC-1PS- XX ²
3-way 120/277V 15A	CA-3PS- XX ¹ SC-3PS- XX ²
4-way 120/277V 15A	CA-4PS-XX¹ SC-4PS-XX²

Mechanical switches with locator light

Single-pole 120V 15A	CA-1PSNL- XX ³ SC-1PSNL- XX ⁴
3-way 120V 15A	CA-3PSNL- XX ³ SC-3PSNL- XX ⁴
4-way 120V 15A	CA-4PSNL- XX ³ SC-4PSNL- XX ⁴

Rated for: incandescent/halogen, magnetic low-voltage, electronic low-voltage, fluorescents, CFLs, LEDs, general purpose fans and motor loads.

No derating required if ganged.

Fan controls

Fan controls—quiet 3-speed

3-way/single-pole 120V 1.5A	DVFSQ-F- XX ¹ DVSCFSQ-F- XX ²
3-way/single-pole 120V 2A	DVFSQ-F-HO- XX ¹

DVFSQ-F-HO model for use with Hunter Original Series fans.

Does not include built-in locator light.

No derating required if ganged.

XX¹: Gloss color codes

XX²: Satin Colors® codes


XX³: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

XX⁴: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

Wallplates not included. Order separately.



Connections overview

Load connections*

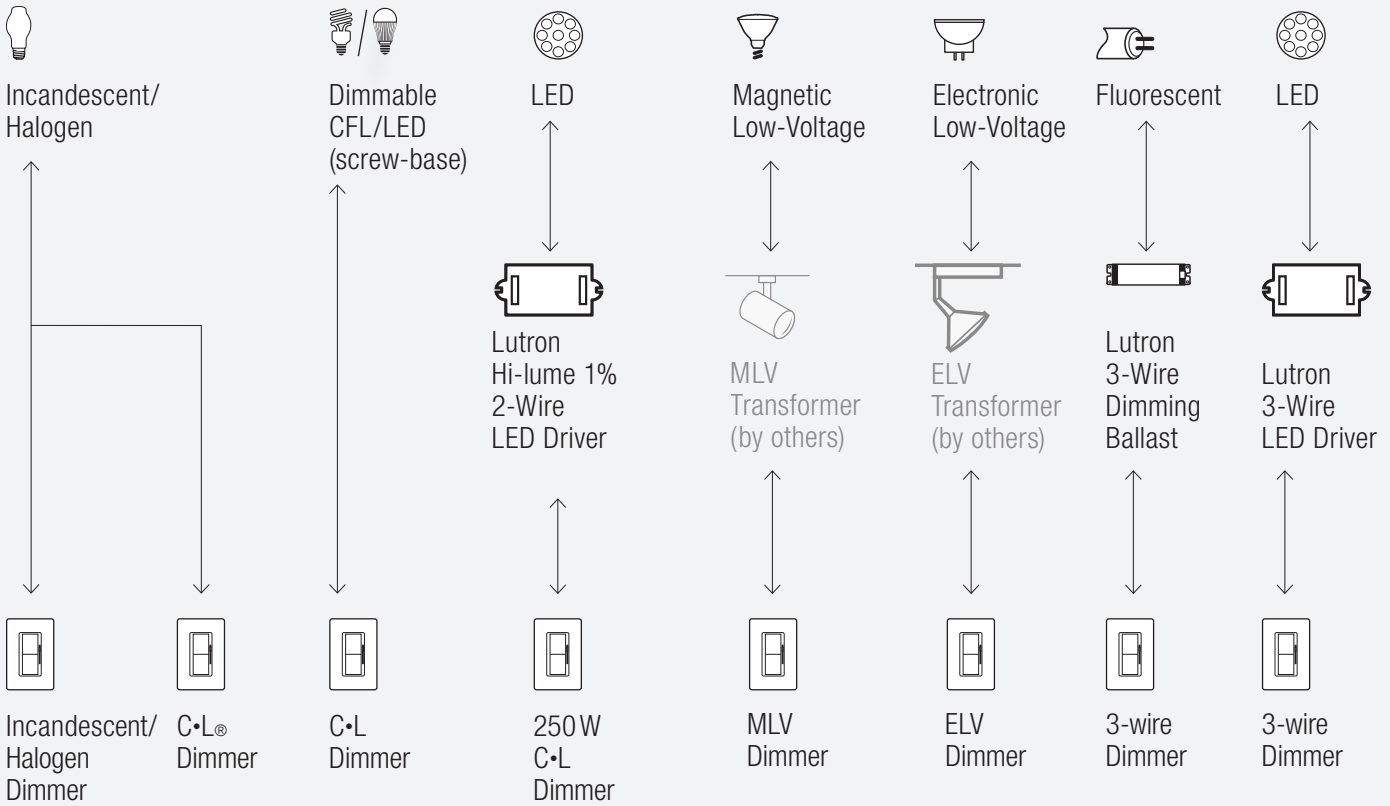


Control types (for 2 or more locations)

Dim from one location, switch from the others

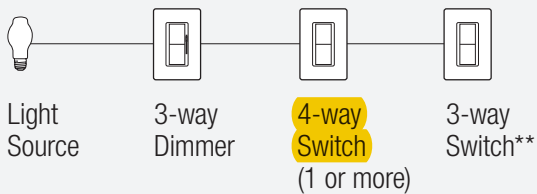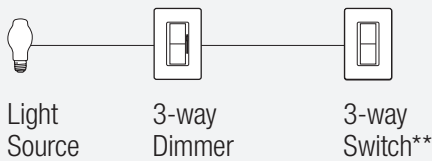

Fan control from one location, switch from the other

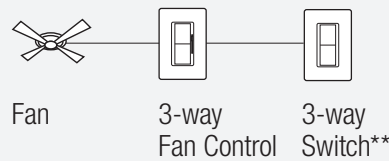

** For 3-way control and 4-way control, use 3-way dimmer/fan control with mechanical 3-way or 4-way switches

***For illustration purposes only.**
Consult model number pages for specific voltage and capacity information.

Replacement plug for dimming



- This plug required for use with Lutron receptacles for dimming use—plug will also work in standard receptacle
- Easily replaces the existing plugs on lamps

Replacement dimming plugs

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

Important notes

- Receptacles and plugs for dimming use are UL listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.

Mechanical switches



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged
- Wallplate sold separately

General purpose switches

Single-pole 120/277V 15A	CA-1PS- XX ¹ SC-1PS- XX ²
3-way 120/277V 15A	CA-3PS- XX ¹ SC-3PS- XX ²
4-way 120/277V 15A	CA-4PS-XX¹ SC-4PS-XX²

General purpose switches with locator light

Single-pole 120V 15A	CA-1PSNL- XX ³ SC-1PSNL- XX ⁴
3-way 120V 15A	CA-3PSNL- XX ³ SC-3PSNL- XX ⁴
4-way 120V 15A	CA-4PSNL- XX ³ SC-4PSNL- XX ⁴

XX¹: Gloss color codes


XX²: Satin Colors® codes

XX³: Available in Almond (AL), Ivory (IV),
Light Almond (LA) and White (WH)


XX⁴: Available in Biscuit (BI), Eggshell (ES),
Goldstone (GS), Limestone (LS), Sea Glass
(SG) and Snow (SW)

Diva® Controls


Dimmers




Incandescent/
Halogen,
Dimmable CFL/LED
(screw-base) –
C-L
DVCL-153P-
DVSCCL-153P-




Incandescent/
Halogen –
eco-dim
DV-603PG-




3-wire Fluorescent
Ballast/LED Driver
DVF-103P-
DVSCF-103P-
DVF-103P-277-
DVSCF-103P-277




Incandescent/
Halogen,
Dimmable CFL/
LED (screw-base),
Hi-lume® 1%
2-wire LED Driver
–
C-L
DVCL-253P-
DVSCCL-253P-




Magnetic
Low-Voltage
DVLV-600P-
DVSCLV-600P-
DVLV-10P-
DVSCLV-10P-
DVLV-603P-
DVSCLV-603P-
DVLV-103P-
DVSCLV-103P-




0-10V
Fluorescent/
LED Fixture
DVSTV-
DVSCSTV-
DVTV-
DVSCTV-



Incandescent/
Halogen
DV-600P-
DVSC-600P-
DV-10P-
DVSC-10P-
DV-603P-
DVSC-603P-
DV-103P-
DVSC-103P-




Electronic
Low-Voltage
DVELV-300P-
DVSCELV-300P-
DVELV-303P-
DVSCELV-303P-




Tu-Wire
Fluorescent Ballast
DVFTU-5A3P-
DVSCFTU-5A3P-

Mechanical Switches




General Purpose
Switch
CA-1PS-
SC-1PS-
CA-3PS-
SC-3PS-
CA-4PS-
SC-4PS-



General Purpose
Switch with
Locator Light
CA-1PSNL-
SC-1PSNL-
CA-3PSNL-
SC-3PSNL-
CA-4PSNL-
SC-4PSNL-


Fan Controls




Quiet 3-speed
DVFSQ-F-
DVSCFSQ-F-
DVFSQ-F-HO-

Designer | Claro® and Satin Colors® Wallplates & Accessories


Accessories




Cable Jack
CA-CJ-
SC-CJ-




Receptacle
CAR-15-
SCR-15-
NCR-20-




Dual Dimming, Tamper-resistant Receptacle
CAR-15-DDTR-
SCR-15-DDTR-
CAR-20-DDTR-
SCR-20-DDTR-




Replacement Dimming Plug
RP-FDU-10-




Telephone Jack
CA-PJ-
SC-PJ-




Tamper-resistant Receptacle
CARS-15-TR-
SCRS-15-TR-
SCRS-20-TR-




Half Dimming, Tamper-resistant Receptacle
CAR-15-HDTR-
SCR-15-HDTR-
CAR-20-HDTR-
SCR-20-HDTR-




General Purpose Switch
CA-1PS-
SC-1PS-
CA-3PS-
SC-3PS-
CA-4PS-
SC-4PS-




Field Customizable 6-port Frame
CA-6PF-
SC-6PF-



Tamper-resistant USB Receptacle
CAR-15-UBTR-
SCR-15-UBTR-



General Purpose Switch with Locator Light
CA-1PSNL-
SC-1PSNL-
CA-3PSNL-
SC-3PSNL-
CA-4PSNL-
SC-4PSNL-



Tamper-resistant, Self-testing GFCI Receptacle
CAR-15-GFST-
SCR-15-GFST
SCR-20-GFST-