

55184

LED 2x4 DIMMABLE PANEL / 75W

TECHNICAL DATA SHEET

FEATURES



INDOOR LUMINAIRES

LED panels provide smooth glare-free illumination and uniform edge-to-edge light distribution for a clean, modern look. Simple installation; for use in drop ceilings or drywall.

- 0-10V dimming function, dimming range is 10% - 100%
- Hanging apparatus not included.


APPLICATION

Panels are the ideal energy-efficient replacements for fluorescent fixtures in offices, schools, hospitality, healthcare and other commercial and industrial applications.

SPECIFICATIONS	
Power Consumption	75W
Input Voltage	120-277V
Power Factor	0.9
Lumens	7116
Luminous Efficiency	95 Lm/W
Color Temperature	5000K
CRI	83
Frame	White
Average Life	50,000
Dimension (Inches)	47.7"(L) x 23.7"(W) x 0.5"(H)



DIMENSIONS

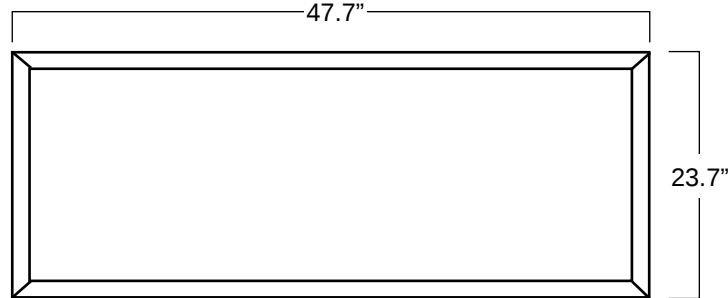

ORDERING

ITEM#	DESCRIPTION	WATT	COLOR	LUMENS	CRI	VOLT	HOURS	FRAME	CASE
55184	LED 2X4 PANEL 75W/50K/120-277V/DIMMABLE/V4 - SL® DLC	75	5000K	7116	83	120-277V	50,000	WHITE	2